# Panasonic

## R32 RESIDENTIAL & LIGHT COMMERCIAL AIR CONDITIONING 2020 / 2021

QUALITY AIR FOR LIFE



# Panasonic

### Building Passion, Building Solutions. Panasonic Air Conditioning Systems

We face a time in which "quality air" differentiates business. It's a time for Panasonic to fully display its strengths. Our ability to assemble and build superior systems isn't just due to the rich resources we have as a comprehensive electronics manufacturer, but also to Panasonic's 100 years of tradition, where each person thinks and acts on their own initiative while working in a team to reach further heights. We do not compromise. Each of our independent selves is a one stop solution. We face our customers' challenges together with our customers and do all that we can to build effective systems. As a true partner for our customers, we strive to always be at the forefront of business.

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of March 2021.
- Due to printing considerations, actual colours may vary slightly from those shown.
- All graphics are provided solely for the purpose of illustrating a point.

Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for damage or deterioration in safety due to usage of other refrigerant. Authorised Dealer

OCAU\_R32 PAC\_CAT\_2020\_V3

### Panasonic Australia Pty. Limited.

Address: 1 Innovation Road, Macquarie Park, NSW 2113 ACN 001 592 187 ABN 83 001 592 187

aircon.panasonic.com.au







## A Better Life, A Better World

# The new Panasonic NX series The next generation is now

The new CONEX remote controller (CZ-RTC6BLW) multiplies the benefits of a standard nanoe<sup>™</sup>X installation, letting you create clean, healthy air in your living spaces 24 hours a day, anytime, anywhere. Choose your quality of air - a new era in air conditioning solutions is here.

## CONTENTS

Product Line-up	4 - 5
Better Air Quality	6 - 11
CONEX	12 - 15
Ducted	16 - 19
Outdoor Unit	20 - 29

24-hour



## **24-hour nance<sup>™</sup> X Air purification** Unlike the general filters found in an air purifier, nance<sup>™</sup> X achieves a powerful inhibiting effect on not only airborne, but also adhered bacteria and viruses.

\*1 The nance™ X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.

P. 6 - 11

CONEX goes beyond simple remote control to combine sophistication with simplicity, offering IoT integration that connects directly to a variety of apps for next-generation solutions.

P. 12 - 15

2

Indoor Unit	
High Static Pressure Ducted	30 - 33
High Static Pressure Splittable Ducted	34 - 35
High Static Pressure Adaptive Ducted	36 - 39
Ultra Slim Ducted	40 - 41
4-WAY Cassette	42 - 45
4-WAY Mini Cassette	46 - 47
Under Ceiling	48 - 51
Wall Mounted	52 - 53
Floor Console	54 - 55
Dimensions	56 - 61
Smart Control Management Solutions	62 - 63
Panasonic Comfort Cloud	64 - 65
Home Automation	66 - 67
PAC Smart Connectivity+	68 - 75
Panasonic AC Smart Cloud	76 - 77
Controllers	78 - 87



### Maximum versatility adaptive ducted unit

Designed to deliver flexibility, performance, and comfort, Panasonic introduces an industry-leading horizontal/vertical design featuring powerful 150Pa static pressure in a compact unit. Note: PF3 range only. Panasonic

## Product Line-up

Produc	t Line-up														
	Cooling Capacity			2.5 kW	3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW	16.0 kW	18.0 kW	20.0 kW	22.4 kW
	Ducted	High Static Ducted	Conacce X noe X Generator Mark 2 CONAVI ready				S-60PE3	R S-71PE3R	S-100PE3R	S-125PE3R	S-140PE3R	S-160PE3R			
		Splittable Ducted High Static Pressure Model Page 34-35 for 18kW - 22.4kW											S-180PE3R5B	S-200PE3R5B	S-224PE3R5B
		Adaptive Ducted high Static Pressure Model	Contraction Mark 2		S-365	50PF3E S-3650PF	3E S-6071PF3	E S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E				
		Ultra Slim Ducted Page 40-41		CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW								
Indoor Unit	Cassette	NX Series 4-WAY Cassette re * Panel is provided as an option (CZ-KPU3H/CZ-KPU3A) Page 42-45	CONAVI ready				S-6071PU3	E S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E				
		Mini Cassette Page 46-47		CS-Z25UB4RAW	CS-Z35UB4RAW	CS-Z50UB4RAW	CS-Z60UB4RAW								
	Under Ceiling	Page 48-51 Conce X Generator Mark 2	ECONAVI ECONAVI ready					3E S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E				
	Wall Mounted		ECONAVI ECONAVI ready						S-100PK3R						
	Floor Console		_	CS-Z25UFRAW	CS-Z35UFRAW	CS-Z50UFRAW									
	NX Series*1	R32 Deluxe Model	D22					U-71PZH3R5	U-100PZH3R5 U-100PZH3R8*2	U-125PZH3R5 U-125PZH3R8*2	U-140PZH3R5 U-140PZH3R8*2	U-160PZH2R5 U-160PZH2R8*2	U-180PZH2R8*2	U-200PZH2R8*2	U-224PZH2R8*2
	*1 Except 16kW onwards	Page 20-29	R32 DRED ready												•
Outdoor Unit		R32 Compact Model Page 20-29	R32 EFFERENCE		U-36P.			R5 U-71PZ3R5	U-100PZ3R5 U-100PZ3R8*2	U-125PZ3R5 U-125PZ3R8*2	U-140PZ3R5 U-140PZ3R8*2				*² 3 phase
	R32 Model		R32 CRED ready	CU-Z25UBRA	CU-Z35UBRA	CU-Z50UBRA	CU-Z60UBRA								

4

# 24-hour nanoe<sup>™</sup>X Air purification\*

While the general filters in air purifiers are effective against airborne bacteria and viruses, nanoe<sup>™</sup>X also works to inhibit longer-living, adhered bacteria and viruses. As well as this, the CONEX remote control (CZ-RTC6BLW) gives you access to your air conditioner anywhere, anytime, so you can turn nanoe<sup>™</sup>X on even while you're out and enjoy 24-hour quality air in your home.



\*1 The nance™ X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function. navirus-lifespan-on-surfaces-graphic-2020-3 https://www.business

## How does nanoe<sup>™</sup> X technology work against viruses?



### Huge Quantity

9.6 trillion hydroxyl radicals are generated per second, inhibiting bacteria and adhered viruses. (nanoe X Generator Mark 1 generates 4.8 trillion hydroxyl radicals/ sec)



### **2** Longer lifespan

By creating hydroxyl radicals contained in water, nanoe™ X technology, increasing hydroxyl radicals lifetime so that nanoe™ X can spread over long distances.

https://www.panasonic.com/global/consumer/ clean/hydroxyl/technology.htm




### • Actively fill the room

Going beyond standard filter technology, hydroxyl radicals circulate throughout rooms inhibiting both airborne and adhered bacteria and viruses


## Effective on Adhered Pollutants

nanoe<sup>™</sup> X penetrates deep into fabrics and deodorises, inhibits bacteria, viruses, mould, allergens, pollen and hazardous substances.

nance™ X extensively spread out through the room to inhibit adhered pollutants adhering to surfaces, while air filters only collect airborne dust but adhered substances.

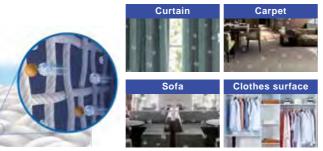

## nanoe<sup>™</sup> X works even in larger space<sup>®</sup>

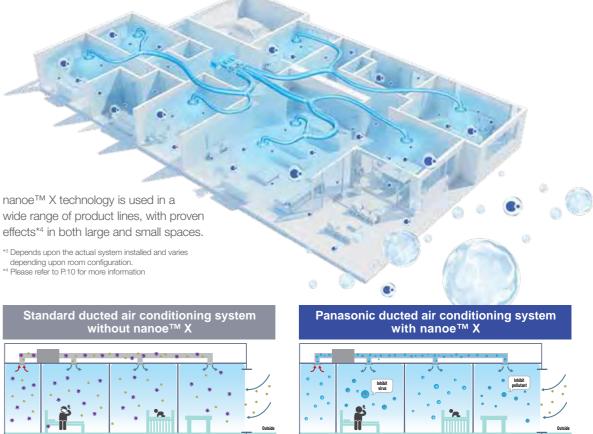

Viruses or bacteria carried by a room's occupants, as well as external pollutants from open windows, may actually be circulated around a home by conventional air conditioning.

## 24hr nanoe<sup>™</sup> X comfort, wherever you are, anywhere, anytime

Get 24 hr Quality Air for you and your loved ones by turning nanoe™ X on using Panasonic Comfort Cloud\*5 even when you're out, and enjoying clean air when you're at home. nanoe™ X functions in both cooling and heating modes and is maintenance-free, helping you keep your costs down with cleaner air.



## Image: Ima

With a nance™ X-equipped ducted unit, it's not only viruses and bacteria that are circulated, the ducted unit itself produces a massive 9.6 trillion hydroxyl radicals per second which are delivered to rooms throughout the house, inhibiting viruses and bacteria.

Energy consumption may vary depending on models and the external static pressure

# **Bringing nature's** balance indoors

nance<sup>™</sup>X technology with the benefits of hydroxyl radicals


The well-being benefits of nature are well known - but do you know the power of hydroxyl radicals?

Abundant in nature, hydroxyl radicals (also known as OH radicals) inhibit pollutants, viruses and bacteria to clean and deodorise. nanoe<sup>™</sup> X technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a clean and pleasant place to be, whether at home, at work, visiting hotels, shops or restaurants.

> Hydroxyl radicals contained in water

## A naturally occurring process

Hydroxyl radicals are unstable molecules looking to react with other elements like hydrogen molecules of pollutants. Thanks to this reaction, hydroxyl radicals inhibit the growth of pollutants such as viruses, bacteria, moulds, and odours, breaking them down and neutralising the unpleasant effects. This naturally occurring process has major benefits to improve indoor air quality.



Bringing nature's balance indoors nanoe<sup>™</sup> X technology with the benefits of hydroxyl radicals

## nance<sup>™</sup>X technology with the benefits of hydroxyl radicals

Panasonic's nanoe<sup>™</sup>X technology takes a step further and brings nature's detergent - hydroxyl radicals - indoors to help create an ideal environment.

By creating hydroxyl radicals contained in water, nanoe™ X technology significantly boosts their effectiveness, increasing hydroxyl radicals lifetime from less than a second in nature, to more than 600 seconds - 10 minutes.

https://www.panasonic.com/global/consumer/clean/hydroxyl/technology.html




Hvdroxvl radicals in nature

Hydroxyl radicals contained in wate nanoe<sup>™</sup> X

## Effectiveness of nance<sup>™</sup>X


nanoe™ X deodorises, inhibits bacteria & viruses, mould, allergens, pollen and hazardous substances, as well as moisturising the whole room for smoother skin and hair.

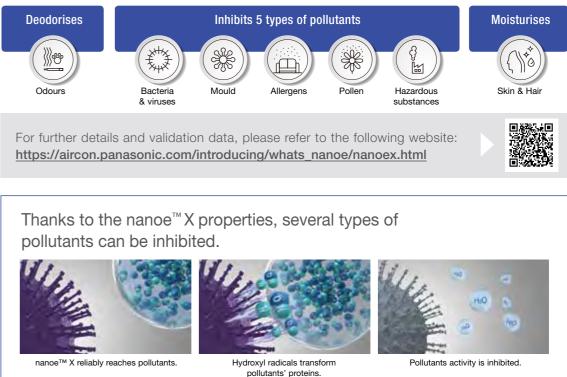



## The evolution of nanoe<sup>™</sup> X technology

Through continuous research and development, nanoe™ X is the latest generation of Panasonic nanoe technology.

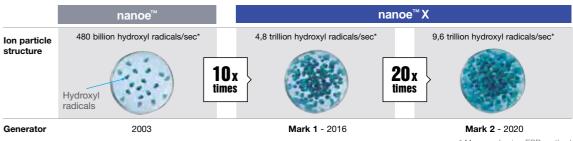

## Sensitive Choice (National Asthma **Council Australia) Approved**

Sensitive Choice is a community service program that aims to educate people on the importance of managing asthma and allergies. Developed by the National Asthma Council Australia in 2006, the program also encourages companies to produce products and services that are more asthma and allergy aware. Panasonic and Sensitive Choice have partnered to introduce nance™ X to the Australian market.

8



Measured using ESR method



## Verification tests for nanoe<sup>™</sup> X effects in large spaces




### The nance<sup>™</sup> X inhibited hexadecane, a chemical contained in PM2.5 (267 m<sup>2</sup>)

3rd party

A third-party certification organization SIRIM Berhad (SIRIM)<sup>11</sup>, conducted the performance experiment using a 4-Way Cassette equipped with a nanoe<sup>™</sup> X device to inhibit hexadecane<sup>\*2</sup>, a chemical contained in PM2.5.



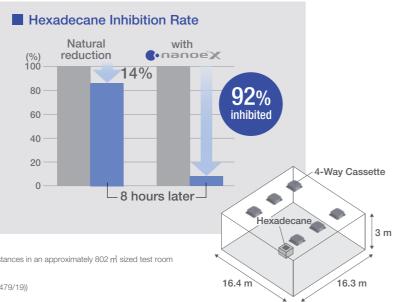

company of the Malaysian Government under the Ministry of International Trade and Industry (MITI). <sup>2</sup> Hexadecane is a hazardous substance contained in gasoline and diesel exhaust gas

Testing method: Measured the amount of attached organic substances in an approximately 802 m sized test room Inhibition method: nanoe X Generator Mark 1 released Test substance: Hexadecane

Test result: Broken down 92% in 8 hours (FTBC257/16/1402 (B479/19))

}}}% odours

### The nanoe<sup>™</sup> X reduced the odours adhering to fibers such as curtains and carpets (139m<sup>2</sup>)

3rd party


### Cigarette smoke odour

### Results

Compared to natural reduction, the nanoe™ X blast reduced the odour intensity by more than approximately 0.7 after two hours.

### Testing organization

KAKEN TEST CENTER General Incorporated Foundation in Japan, international testing institute.

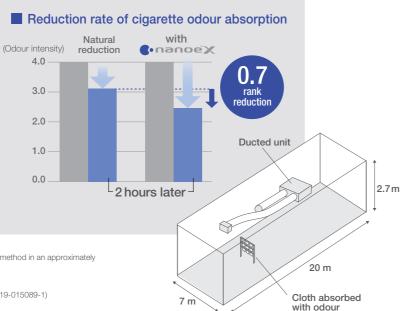

Testing method: Verified using the six-level odour intensity scale method in an approximately 378m sized test room

Inhibition method: nanoe X Generator Mark 2 released Test substance: Surface-attached cigarette smoke odour

Test result: Odour intensity reduced by 0.7 levels in 2 hours (KT-19-015089-1)

## The effects of nanoe<sup>™</sup>X are recognised by experts in each field



Osaka Prefecture University

Masafumi

Mukamoto

Disease Studies

Veterinary Infectious

Various types of moulds enter houses along with people and air. Even if preventive action is taken in our everyday lives, it is often very difficult to inhibit the growth of mould, especially in humid environments. With nanoe™ X, we have experimental results\*3\*4 that show we can inhibit the growth of the types of mould and bacteria commonly found in various places in the house.

### Hope for the creation of more comfortable spaces for those who have problems with asthma or atopic dermatitis






Professor Masahiro Sakaguchi

Azabu University School of Veterinary Medicine Laboratory of Veterinary Microbiology I

We have experimental results that show nanoe™ X is capable of inhibiting allergens, such as pollen and dust mites. It is important to take precautions against the allergens that we inadvertently inhale in our daily lives. As nanoe™ X is effective in inhibiting invisible allergens, we can expect it will create a cleaner environment. As the safety of nanoe™ X has also been verified, nance™ X gives peace of mind to families with small children.

<sup>13</sup> Experimental results show that nanoe<sup>TM</sup> X is effective in inhibiting the growth of the following types of mould and bacteria commonly found in homes: Mould: Trichophyton, Cladosporium, Malassezia furfur, Sporthrix schenckii, Exophiala jeanselmei, Absidia corymbifera, Rhodotorula rubra, Neurospora sitophila, Schizophyllum communeBacteria: Methicillin-resistant Staphylococcus aureus (MRSA), Listeria monocytogenes, Bacillus subtilis, Mycobacterium smegmatis, Nocardia asteroids, Neisseria gonorrhoeae, Salmonella enterica subsp. Enterica, Haemophilus influenza, Campylobacter jejuni. \* This verification was designed to generate basic research data on the effects of nanceTM X on the mould and bacteria in laboratory conditions different from those found in living spaces. It was not designed to evaluate product performance.

## nanoe X

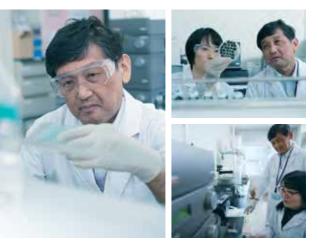



# **Smart comfort** with CONEX

CONEX goes beyond simple remote control to combine sophistication with simplicity, offering IoT integration that connects directly to a variety of apps for next-generation solutions.



User friendly interface with stylish design measuring just 86 x 86 mm, CONEX is an extremely compact remote controller which looks great in any room.

## CO (CZ-RTC6BL/CZ-RTC6BLW)

25.°c

## Easy control and access for end users, installers, and service partners with just one remote

User-friendly day-to-day operation for end users, simplified set up for installers, and convenient after-sales service access for service partners - all with one remote control.






## A next-generation remote control solution optimised for usability, whatever your needs



anywhere anytime



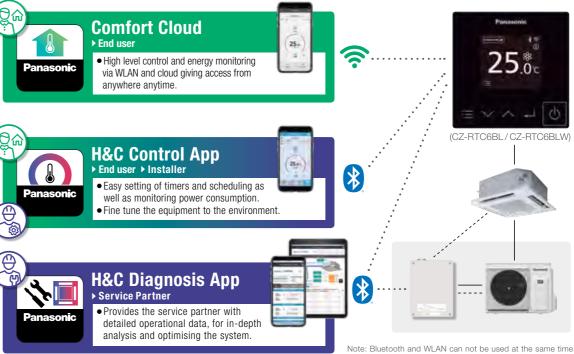

Note: Can be used with new NX series only

## True-comfort for end user– Comfort Cloud App

With Comfort Cloud, even when you are out, at anytime, you can maintain air quality as you please.





Note: Product images not to scale





### For restaurant owners

Remote control makes 24-hr nanoe™X air purification\*1 in restaurants a reality, even when they're closed.

### For shop owners

Air conditioning before opening and give visitors a more comfortable experience.

### For boutique hotel owners

Air conditioning before your guests arrive and give them the welcome they deserve.

\*1 The nance TM X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.

## True-comfort for end user and installer – H&C Control App

H&C Control App makes complex initial set-up easy and allows you to respond swiftly to clients' requests via Bluetooth using a smartphone or tablet.





### Advantages

### Comfort day-to day operations

It's now simpler than ever for end users to further customise settings to meet their needs and perform operations including basic settings.

### Straightforward suggestions to clients

Share a single screen with your customer and together tailor everything to meet their needs, from basic setup to weekly timers, all in real time.

### Intuitive operation for easy configuration

Simplified initial controller configuration together with easy access to comprehensive settings including weekly timer and maintenance.

### Quicker configuration for multiple controllers

Save time with templates - Copy weekly timers and settings to multiple controllers.



## True-comfort for service partners – H&C Diagnosis App

The H&C Diagnosis app allows users to intuitively browse current stats and information about an air conditioner via Bluetooth<sup>®</sup> using a smartphone or tablet and without the need to use a PC.




### Advantages

### Acquire diagnostic information from both outside and inside

Outdoor diagnosis is now possible via a new service checker interface\*1. With CONEX, operation status can be checked and failure can be diagnosed from indoors too. The information you need is now available via both indoor and outdoor units even when site access may be difficult for either indoor or outdoor unit.

\*1 Available as a spare part, compatible with new NX series only.





Refrigerant circuit view

### Real time data



### Acquire the information you need intuitively and quickly

Easy access to real-time service parameters and service checker data allows for more accurate repairs. Actual real-time operation data can be toggled between system and refrigerant circuit views, and previously recorded data can be viewed in the history.

A comprehensive error code table and guide gives details of error codes and how to handle them.

0.94.01		HACO	-	1 Aug			
		1960.0		8.468	S		
						-	
manager \$100	-		-	_		- 10 A ST	
	_			_	_	*******	
	_	-	-	_			_
		_	_				
and the second second		_	-0.4	-	-		
-	-						
-	-	-	_	_	-	-	-
	-	-	-	-	-	-	-
-	-				-		- 1
and in case of							
Sugar and a summaries of	-	-	-	-	-	1.0	-
Name and Address of the Owner, which the			10			-	1.00
the second secon					-8	-	-
	1.		10	100		1.1	1.4
	1	-	-	-			-
and a second sec	-	-	-	-	-		-
and the second se	-		1.00	1.2		- 91	- 84
						-	
the state of the s			0.0				
And in case of the local division of the loc							
State of Sta							
and the second se	4	-	-	1	- 2-	-	- 2
and the second se		12.1	-				
and the second se	-	- 2-		-			
the statement of the state		~	-	10			-
Sector Contractor							1.40
and the second se		-		1	-		-
The Parameter	3	1	-	1.1	1	- 5-	1
and the second se	-	1.1	2	1.1			-
	ded .	- 100	144	1.00	-	164	-
					-		
-	_	-	_	-	_	-	-
and the second second	-	-	_	-	-	-	-
and a second sec	-	-		-	-	-+#	
Contraction of the local division of the loc	100			-		1.04	
and the second s	-			-	-		
the second se	-	-		-	-		
	-			T	-		

History data



New service checker interface (Details are written in P.81)

# Maximum versatility adaptive ducted unit


Designed to deliver flexibility, performance, and comfort, Panasonic introduces an industry-leading horizontal/ vertical design featuring powerful 150Pa static pressure in a compact unit. Leading-class noise level performance and nanoe™X technology provide comfort that's carried right the way through the ductwork.




## Powerful 150Pa ESP in an industry-leading vertical installation

Our groundbreaking drain pan design delivers a ducted unit that can be mounted horizontally or vertically without the need for alterations\*1. Even when ceiling space for ductwork is limited, the slim design and powerful 150Pa static pressure allow for discrete placement away from rooms for total installation flexibility.

\*1 Please refer to Installation Manual for full details

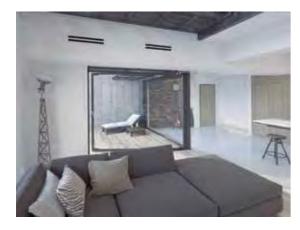

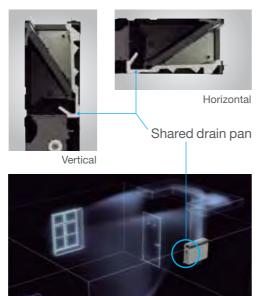

5 5

### Drain pan is shared in both cases horizontal and vertical installation.

## Top-class noise level performance

A proprietary improved casing design realises an even smoother airflow and low noise (22dB -29dB) operation while effortlessly maintaining enough pressure\*2 to deliver quiet comfort ideal for hotel and guest rooms.

\*2 Operating at 50Pa static pressure in Low fan mode.



# 25 20 15


## Superior Air Quality

The new ducted models are equipped with nanoe™ X as standard, an unique air quality improvement technology producing twice the amount of hydroxyl radicals compared to previous generations. Combined with the strong static pressure this ensures pristine nanoe™ X air travels unaffected even through multiple duct shapes at lengths of 10m, as well as making them ideal for use in larger spaces.

Note: PF3 and PE3 (16.0kW and below) ranges only.

## Power-packed lower profile body

The indoor units have also been completely renewed, offering a 40mm height reduction to only 250mm\*3 and a weight reduction of up to 10%, all while maintaining the same powerful 150 Pa.

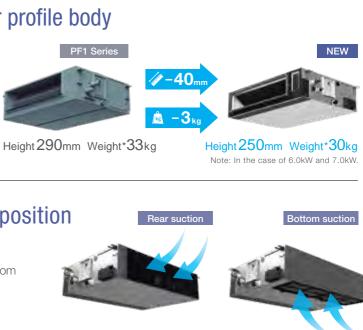


\*3 Compared to previous PF range.


## Selectable air inlet position

The air inlet position is adjustable via a removable panel to allow both rear or bottom entry, depending on the duct installation.



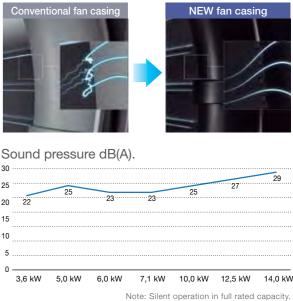

**C**•nanoe X

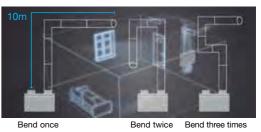

Based on in-house test result, even with a total ductwork length up to 10m, effectiveness of nanoe™ X is maintained.

# Easy to install splittable ducted

Create comfort faster. The newly designed high static pressure ducted model is improved for a more flexible installation. By dividing the unit into 3 components, the burden of installation is reduced.

Note: In the case of the S-180PE3R5B, S-200PE3R5B, and S-224PE3R5B

## Even cooling for all rooms

### Top Grade of Airflow Volume

Providing powerful air, Panasonic's splittable ducted has increased the rate of airflow by 16%<sup>\*1</sup>, reaching up to 1,400 L/s<sup>\*2</sup>. Its powerful airflow enables faster room temperature control.





\*1 Comparison between S-224PE3R5B and S-224PE2R5B \*2 In case of S-224PE3R5B

### 3-step Static Pressure Set Up

You can select between the three Static Pressure modes of 200 Pa / 130 Pa / 75 Pa for extra installation flexibility.



### Max.200 Pa Static Pressure Setting

A maximum static pressure setting of a powerful 200Pa enables the use of long ducts for installation in a wide range of spaces. Ideal for large-scale houses,

offices and restaurants

## Easy Installation Design

### 3 Components For Easy In-Ceiling Assembly

The newly designed high static pressure ducted consists of 3 components, the heat exchanger, the fan and the fan casing. For easy installation, the unit has been designed to be lifted into the roof via return air grille, separated, and easily reassembled when in position.

### New Ducted Model Key Factors

### Bell Shaped Keyhole for Weight Support

Part of the keyhole is newly designed with a bell shape to reduce the burden of installation. It also enables temporary attachment.



## 2 Wire Connectors for Easy Installation

With only 2 wire connectors, installation has become much easier and faster.



### 12 Bolts & Screws for Easy Assembly

Only 12 screws and bolts need to be attached, allowing for a shorter installation time.

### Easy Assembly Steps

Assembly takes three easy steps, even in limited spaces.



Install the fan to the heat exchanger and tighten the screws and bolts.











Assemble the connectors.

3 Install the chassis and tighten the screws and bolts.





# All side discharge R32 outdoor units

Panasonic's new range of outdoor units feature intuitive technology and thoughtful engineering. The two innovative ranges of R32 units, both Deluxe and Compact, feature energy and space saving technologies, permitting installation in even the tightest and most demanding conditions.





## More Efficient, Less Space

Whilst maintaining its strong power, new R32 outdoor units get smaller. This enables them to fit into tighter spaces. Thus you can install these units in a vast variety of areas.

### All side discharge from 6.0kw to 22.4kW







11-100P7H3R8







11-140P7H3R8



11-160P7H2R8\*





R32 Deluxe





11-125P7H3B8











U-125P73R8








U-224PZH2R8

R32 Compa

## Precise Temperature Control


### Constant Comfort Air Conditioning

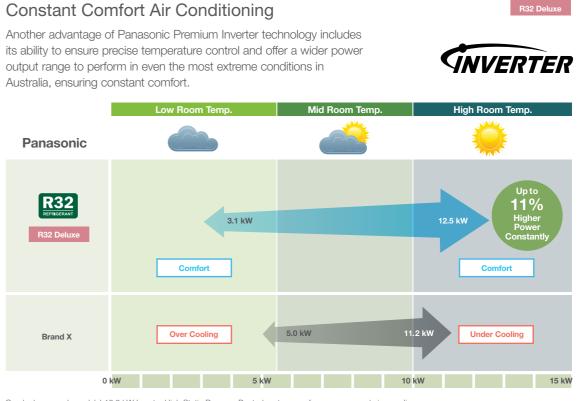

### Graph shows each models' 10.0 kW Inverter High Static Pressure Ducted systems performance range during cooling


## NX Series - Refurbishing Made Easy

The new NX series has been developed to use 3-wired communication, making it simple to replace the three wire systems often used in older installations.

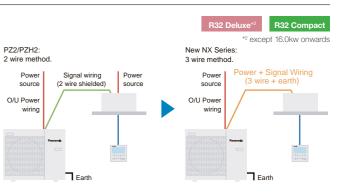

## R22 Renewal. Fast, easy to install and cost-effective

Panasonic refrigerant oil is engineered to avoid the damage to units that can happen when oil types commonly found in air-conditioning systems react with each other. As well as preventing damage, this makes replacing R22 systems with the latest R32 model as simple as reusing the existing piping and replacing the indoor and outdoor unit. Switching to the latest R32 system also improves energy efficiency by approximately 30% compared to the R22 system.

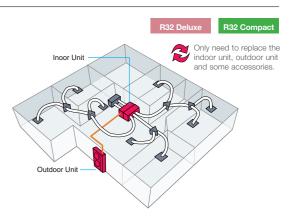

Note: Only use existing piping after checking "IN CASE OF REUSING EXISTING REFRIGERANT PIPING" in the installation manual.

## **Outdoor Unit**

## **Outdoor Unit Dimensions**

## Next Generation Refrigerant: R32

R32, an innovative refrigerant in all ways imaginable: it is easy to install, and compared to most other refrigerants it has a much lower environmental impact and saves energy.

R32 Deluxe B32 Compa

R32 Deluxe

- Low Global Warming Potential (GWP): 75% less impact on global warming vs R410A
- Energy Efficient: Higher energy efficiency than R410A
- Easy Installation: This refrigerant is 100% pure which makes it easier to recycle and reuse.

R32 Deluxe

leight difference 30m\*

5m if the outdoor unit selow the indoor unit 7.1kW - 14.0kW)

### Energy Saving Technology

The use of energy saving design for the structure of fans, fan motors, compressors and heat exchangers results in high TCSPF and HSPF value, which ranks as one of the top in the industry.





## Other Advanced Technology

### Increased Piping Length for Greater Design Flexibility

Adaptable to various building types and sizes

Max. piping length : 50m (7.1kW), 85m (10.0kW-14.0kW), 75m (16.0kW, 18.0kW) 60m (20.0kW, 22.4kW)



## R32 Compact R32 Deluxe

All Panasonic air conditioners undergo strict quality and safety tests before sale. This rigorous process includes obtaining all necessary Safety Approvals, to ensure that all air conditioners we sell

are not only built to the highest market standards, but are also completely safe.

# R32 Compact R32 Del

### Quiet Mode

R32 Compact R32 Deluxe


Quiet mode reduces outdoor operating sound by 2dB. External input signal is also available.

### **Demand Response Compliant**

Panasonic air conditioners are equipped with a Demand Response Enabling Device (DRED) which complies to both AS 4755 and AS 3823. Panasonic continues to design and develop products that are tailored to local needs and requirements.

The Equipment Energy Efficiency (E3) program has been supporting the development of DRED standards for air-conditioners which should comply with AS 4755. The functionality will be required for all installations in the very near future






Demand control terminal is available to control 0-50-75-100% of capacities.


### **Deluxe Model**

R32 Deluxe Model Dimensions (7.1kW) U-71PZH3R5

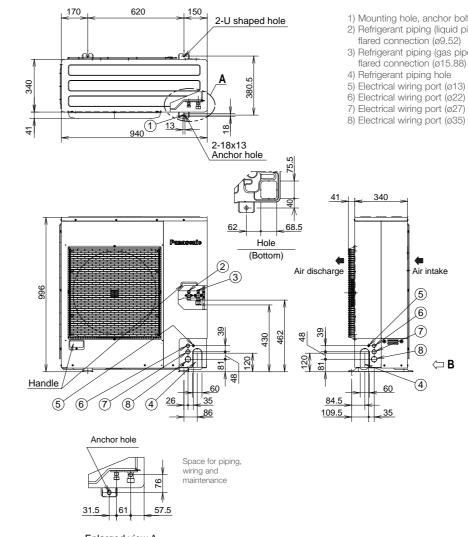



end connection



22

### **Outdoor Unit Features**



- 1) Mounting hole, anchor bolt:M10 2) Refrigerant piping (liquid pipe),
- 3) Refrigerant piping (gas pipe), flared connection (ø15.88)


Unit:mm


## **Outdoor Unit Dimensions**

### **Deluxe Model**


### R32 Deluxe Model Dimensions (10.0kW – 14.0kW)


U-100PZH3R5 / U-100PZH3R8 / U-125PZH3R5 / U-125PZH3R8 / U-140PZH3R5 / U-140PZH3R8

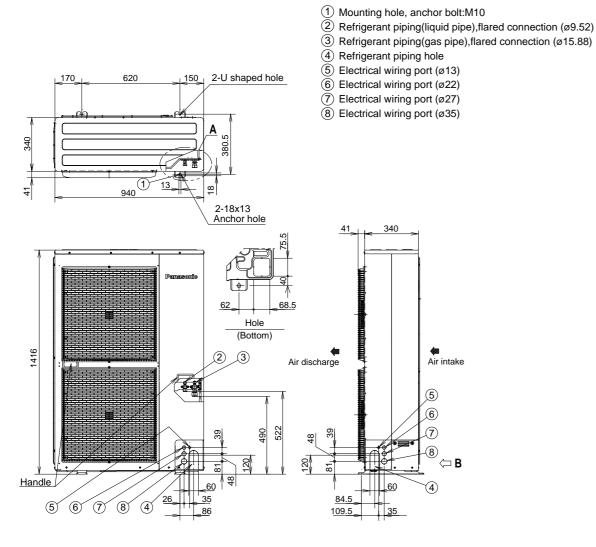

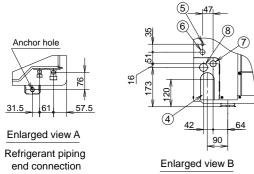

Unit:mm






Enlarged view A

Enlarged view B

## R32 Deluxe Model Dimensions (16.0kW – 22.4kW)

U-160PZH2R5 / U-160PZH2R8 / U-180PZH2R8 / U-200PZH2R8 / U-224PZH2R8

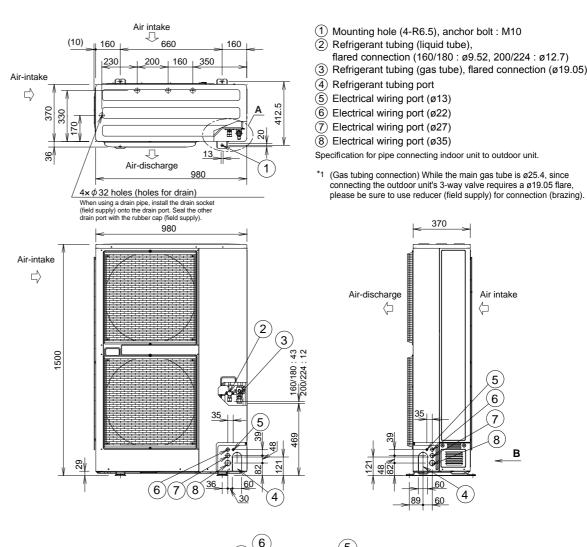

### Outdoor Unit Features

flared connection (160/180 : ø9.52, 200/224 : ø12.7) (3) Refrigerant tubing (gas tube), flared connection (ø19.05)\*1

7


Unit:mm

4


## **Outdoor Unit Dimensions**

### **Compact Model**

R32 Compact Model Dimensions (3.5kW – 5.0kW) U-36PZ3R5 / U-50PZ3R5

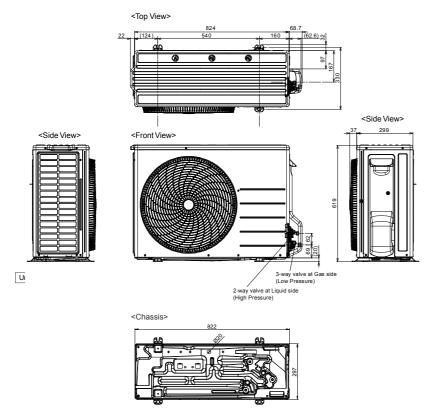


### R32 Compact Model Dimensions (6.0kW – 7.1kW) U-60PZ3R5 / U-71PZ3R5

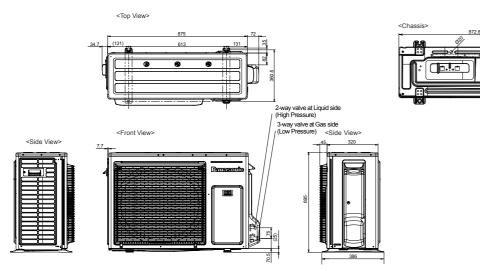

## R32 Compact Model Dimensions (10.0kW - 14.0kW)

U-100PZ3R5 / U-100PZ3R8 / U-125PZ3R5 / U-125PZ3R8 / U-140PZ3R5 / U-140PZ3R8

30

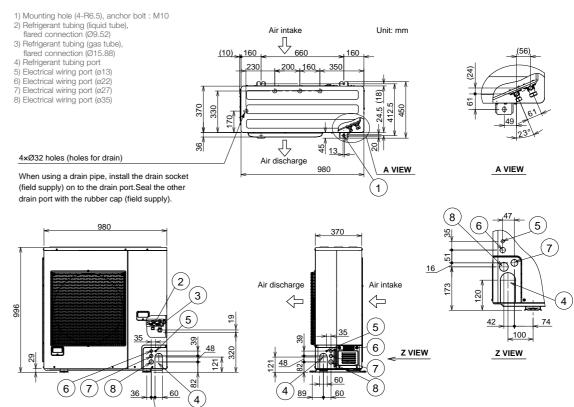


unit: mm

Outdoor Unit Features




## **Outdoor Unit Dimensions**


### R32 Model

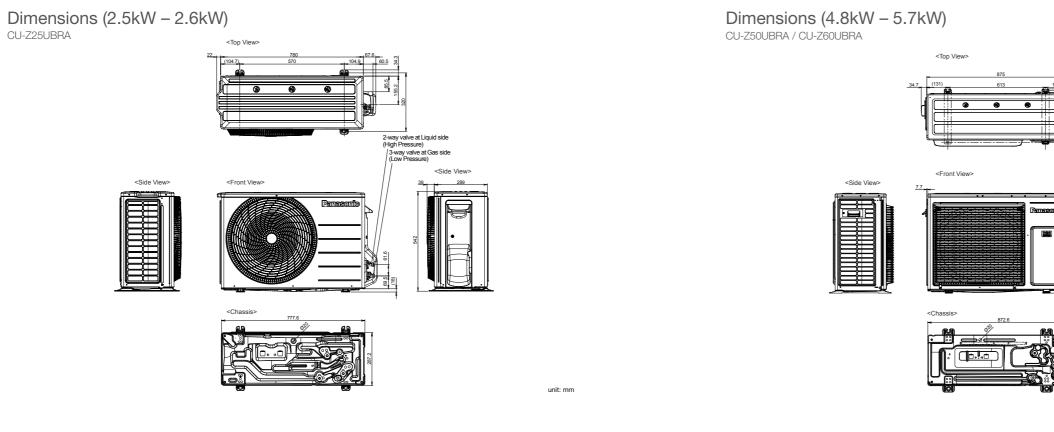


unit: mm



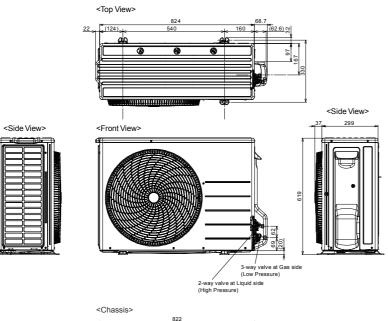



### Outdoor Unit Features

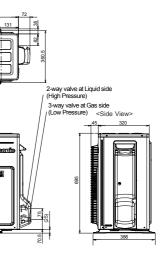



unit: mm




### Technical focus

- Design flexibility thanks to high static pressure and large air volume
- Accurate temperature control to reduce cold drafts during operation
- Compact Body Size Hidden in the ceiling, ideal when interior decor is an important consideration such as in residences with many rooms and light commercial buildings. 290mn S-60PE3R 1200mr 360mm S-71PE3R S-125PE3R S-100PE3R S-140PE3R S-160PE3R

### System Example


An inspection port (450 mm x 450 mm or more) is required at the control-box side of the indoor unit body.

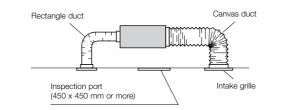

• Configurable air temperature control

### Clean air. Ducts that deliver


Testing has verified that even with three bends and a total length of up to 10m, the effectiveness of nanoe™ X is maintained right through the duct to deliver clean, fresh air where it's needed.

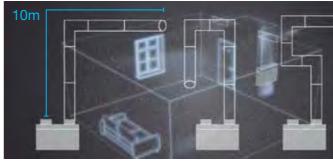

Bend once Bend three times Bend twice As the experiments demonstrate; even with a total ductwork length of up to 10m, effectiveness of nanoe™ X is maintained. Note: PF3 and PE3 (16.0kW and below) ranges only.

## Cold Drafts Reduced During Heating Operation

 Accurate temperature measurement by E1/E2 sensor to reduce cold drafts during heating operation.

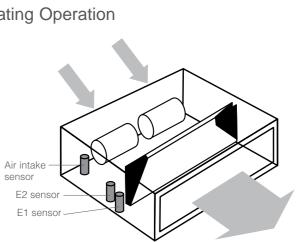







## Indoor Unit: High Static Pressure Ducted

## High Static Pressure Duct R32 Deluxe model

Capacity				7.1kW	10.0kW		12.5kW		14.0kW		16.0kW	
Madal Marsa		Indoor Unit		S-71PE3R	S-100PE3R	S-100PE3R	S-125PE3R	S-125PE3R	S-140PE3R	S-140PE3R	S-160PE3R	S-160PE3R
Model Name		Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8	U-160PZH2R5	U-160PZH2R8
			1.3.67	7.1 (2.2 - 9.0)	10.0 (3.1 - 12.5)	10.0 (3.1 - 12.5)	12.5 (3.2 - 14.0)	12.5 (3.2 - 14.0)	14.0 (3.3 - 16.0)	14.0 (3.3 - 16.0)	16.0 (5.5 - 18.0)	16.0 (5.5 - 18.0)
Cooling capacity :			kW	8.0 (2.0 - 9.0)	11.2 (3.1 - 14.0)	11.2 (3.1 - 14.0)	14.0 (3.2 - 16.0)	14.0 (3.2 - 16.0)	16.0 (3.3 - 18.0)	16.0 (3.3 - 18.0)	18.0 (5.5 - 20.0)	18.0 (5.5 - 20.0)
Heating capacity			BTU/h	24,200 (7,500 - 30,700)	34,100 (10,600 - 42,700)	34,100 (10,600 - 42,700)	42,700 (10,900 - 47,800)	42,700 (10,900 - 47,800)	47,800 (11,300 - 54,600)	47,800 (11,300 - 54,600)	54,600 (18,800 - 61,400)	54,600 (18,800 - 61,400)
			BIU/N	27,300 (6,800 - 30,700)	38,200 (10,600 - 47,800)	38,200 (10,600 - 47,800)	47,800 (10,900 - 54,600)	47,800 (10,900 - 54,600)	54,600 (11,300 - 61,400)	54,600 (11,300 - 61,400)	61,400 (18,800 - 68,200)	61,400 (18,800 - 68,200)
EER : COP			W/W	3.48 : <b>3.88</b>	3.79 : <b>3.78</b>	3.79 : <b>3.78</b>	3.57 : <mark>3.80</mark>	3.57 : 3.80	3.26 : <b>3.68</b>	3.26 : <mark>3.68</mark>	3.29 : <b>3.53</b>	3.29 : <b>3.53</b>
COP@H2 condition			W/W	2.80	2.77	2.77	2.72	2.72	2.65	2.65	2.81	2.81
Total power input		Cooling : Heating	kW	2.04 : 2.06	2.64 : <b>2.96</b>	2.64 : 2.96	3.50 : 3.68	3.50 : <b>3.68</b>	4.30 : 4.35	4.30 : 4.35	4.86 : 5.10	4.86 : 5.10
		Hot Climate		4.68 : 4.82	5.04 : <b>5</b> .10	5.04 : <b>5.10</b>	4.92 : 5.17	4.92 : 5.17	4.29 : <b>4.69</b>	4.29 : 4.69	4.21 : <b>4.61</b>	4.21 : <b>4.61</b>
Re	lesidential	Average Climate		4.11 : 4.22	4.46 : 4.34	4.46 : 4.34	4.49 : 4.40	4.49 : 4.40	3.92 : 4.07	3.92 : 4.07	3.80 : <b>3.99</b>	3.80 : <b>3.99</b>
TCSPF : HSPF		Cold Climate		4.19 : 3.79	4.54 : <b>3.93</b>	4.54 : <b>3.93</b>	4.60 : <b>3.90</b>	4.60 : 3.90	4.03 : <b>3.62</b>	4.03 : <b>3.62</b>	3.85 : <b>3.55</b>	3.85 : <mark>3.55</mark>
		Hot Climate		5.15 : 4.85	5.55 : <b>5.15</b>	5.55 : 5.15	5.36 : 5.23	5.36 : 5.23	4.63 : 4.74	4.63 : 4.74	4.53 : 4.63	4.53 : <b>4.63</b>
C	Commercial	Average Climate		5.00 : 4.52	5.47 : 4.73	5.47 : <b>4.73</b>	5.55 : 4.80	5.55 : 4.80	4.60 : 4.39	4.60 : 4.39	4.54 : 4.28	4.54 : 4.28
		Cold Climate		5.37 : 4.11	5.87 : 4.32	5.87 : 4.32	5.97 : <b>4.31</b>	5.97 : 4.31	4.91 : <b>3.96</b>	4.91 : <b>3.96</b>	4.80 : <b>3.88</b>	4.80 : <b>3.88</b>
Indoor Unit												
Power course			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz			
Power source			V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V
Current (rated)		Cooling : Heating		_*1	_*1	_*1	_*1	_*1	_*1	_*1	2.41 : 2.41 2.38 : 2.38	2.41 : 2.41 2.38 : 2.38
Dimension H	I x W x D	Indoor	mm	360 X 1,200 X 700	360 X 1,200 X 700	360 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700
Net weight		Indoor	kg	36	37	37	41	41	50	50	50	50
Air volume (H/M/L)		Cooling : Heating	L/s	501 / 434 / 367 : 501 / 434 / 367	668 / 584 / 484 : 668 / 584 / 484	668 / 584 / 484 : 668 / 584 / 484	835 / 768 / 601 : 835 / 768 / 601	835 / 768 / 601 : 835 / 768 / 601	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 7
External static pressure	:		Pa	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (50 - 150*2)	100 (50 - 150*2)	100 (50 - 150*2)	100 (50 - 150*2)
Sound pressure level (H	H/M/L)	Cooling : Heating	dB(A)	45 / 44 / 43 : 45 / 44 / 43	48 / 46 / 44 : 48 / 46 / 44	48 / 46 / 44 : 48 / 46 / 44	49 / 47 / 45 : 49 / 47 / 45	49 / 47 / 45 : 49 / 47 / 45	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47
Sound power level (H/N	Л/L)	Cooling : Heating	dB	62 / 61 / 60 : 62 / 61 / 60	70 / 68 / 66 : 70 / 68 / 66	70 / 68 / 66 : 70 / 68 / 66	71 / 69 / 67 : 71 / 69 / 67	71 / 69 / 67 : 71 / 69 / 67	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69
Number of fan speeds				3	3	3	3	3	3	3	3	3
Drain piping			mm	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
Outdoor Unit												
Deurer eeuree			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
Power source			V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)		Cooling : Heating	A	9.85 : 9.95 9.55 : 9.65	12.8 : 14.3 12.2 : 13.7	4.25 : 4.75 4.15 : 4.60	16.7 : <b>17.6</b> 16.0 : <b>16.8</b>	5.60 : <b>5.90</b> 5.40 : <b>5.70</b>	19.7 : 19.9 18.9 : 19.1	6.60 : 6.70 6.35 : 6.45	20.0 : 21.1 19.1 : 20.1	6.95 : 7.30 6.65 : 7.00
Dimension		$H \times W \times D$	mm	996 x 940 x 340	1,416 x 940 x 340	1,416 × 940 × 340	1,416 x 940 x 340	1,416 × 940 × 340	1,416 x 940 x 340	1,416 × 940 × 340	1,500 x 980 x 370	1,500 x 980 x 370
Net weight			kg	66	99	99	99	99	99	99	117	115
Air volume		Cooling : Heating	L/s	1,018 : 1,002	1,970 : <b>1,803</b>	1,970 : <b>1,803</b>	2,087 : <b>1,870</b>	2,087 : <b>1,870</b>	2,154 : 1,937	2,154 : 1,937	2,738 : <b>2,738</b>	2,738 : 2,738
Sound pressure level (Si	Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)	58 (56) : 60 (58)	58 (56) : 60 (58)
Sound power level (Siler	nt mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)	69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)	76 (74) : 78 (76)	76 (74) : 78 (76)
Piping connections		Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø19.05	Ø9.52 / Ø19.05
Pipe length range		min max.	m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 75	5 - 75
Elevation difference (OU	J located lowe	er, OU located higher)	m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	30, 30	30, 30
Maximum chargeless lei	ength		m	30	30	30	30	30	30	30	30	30
Refrigerant at shipping /	/ Additional g	as amount	g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,200 / 45 (g/m)	R32 3,200 / 45 (g/m)
Operating range	5	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 46 : -20 to 24	-15 to 46 : -20 to 24			

## Specifications of R32 Compact Model

Capacity				6.0kW	7.1kW	10.0kW		12.5kW		14.0kW	
		Indoor Unit		S-60PE3R	S-71PE3R	S-100PE3R	S-100PE3R	S-125PE3R	S-125PE3R	S-140PE3R	S-140PE3R
Model Name		Outdoor Unit		U-60PZ3R5	U-71PZ3R5	U-100PZ3R5	U-100PZ3R8	U-125PZ3R5	U-125PZ3R8	U-140PZ3R5	U-140PZ3R8
			13.07	6.0 (2.0 - 7.1)	7.1 (2.6 - 7.7)	10.0 (3.0 - 11.5)	10.0 (3.0 - 11.5)	12.5 (3.2 - 13.5)	12.5 (3.2 - 13.5)	14.0 (3.3 - 15.0)	14.0 (3.3 - 15.0)
Cooling capacity :			kW	6.0 (1.8 - 7.0)	7.1 (2.1 - 8.1)	10.0 (3.0 - 14.0)	10.0 (3.0 - 14.0)	12.5 (3.3 - 15.0)	12.5 (3.3 - 15.0)	14.0 (3.4 - 16.0)	14.0 (3.4 - 16.0)
Heating capacity			BTU/h	20,500 (6,800 - 24,200)	24,200 (8,900 - 26,300)	34,100 (10,200 - 39,200)	34,100 (10,200 - 39,200)	42,700 (10,900 - 46,100)	42,700 (10,900 - 46,100)	47,800 (11,300 - 51,200)	47,800 (11,300 - 5
			BTU/II	20,500 (6,100 - 23,900)	24,200 (7,200 - 27,600)	34,100 (10,200 - 47,800)	34,100 (10,200 - 47,800)	42,700 (11,300 - 51,200)	42,700 (11,300 - 51,200)	47,800 (11,600 - 54,600)	47,800 (11,600 - 5
EER : COP			W/W	3.26 : <b>4.08</b>	3.21 : 4.25	3.58 : 4.08	3.58 : 4.08	3.55 : 4.03	3.55 : <b>4.03</b>	3.25 : 3.76	3.25 : 3.76
COP@H2 condition	on		W/W	3.00	3.11	2.88	2.88	2.56	2.56	2.68	2.68
Total power input		Cooling : Heating	kW	1.84 : 1.47	2.21 : <b>1.67</b>	2.79 : 2.45	2.79 : 2.45	3.52 : <mark>3.10</mark>	3.52 : <mark>3.10</mark>	4.31 : <b>3.72</b>	4.31 : 3.72
		Hot Climate		3.98 : 3.95	3.96 : 4.05	4.64 : 3.95	4.64 : 3.95	4.60 : <b>3.93</b>	4.60 : <b>3.93</b>	4.27 : 3.79	4.27 : 3.79
	Residential	Average Climate		3.56 : <b>3.88</b>	3.59 : <b>4.00</b>	4.17 : <b>3.81</b>	4.17 : <b>3.81</b>	4.16 : 3.79	4.16 : <b>3.79</b>	3.92 : <mark>3.64</mark>	3.92 : 3.64
TCSPF : HSPF		Cold Climate		3.58 : <b>3.59</b>	3.63 : <b>3.70</b>	4.23 : <b>3.55</b>	4.23 : <b>3.55</b>	4.26 : <b>3.47</b>	4.26 : <b>3.47</b>	4.03 : 3.34	4.03 : 3.34
IUSFF. HOFF		Hot Climate		4.25 : <b>3.83</b>	4.22 : <b>3.91</b>	4.99 : 3.90	4.99 : 3.90	4.96 : <b>3.84</b>	4.96 : <b>3.84</b>	4.56 : <b>3.70</b>	4.56 : 3.70
	Commercial	Average Climate		4.16 : <b>3.74</b>	4.19 : <b>3.83</b>	4.98 : <b>3.80</b>	4.98 : <b>3.80</b>	4.88 : <b>3.73</b>	4.88 : <b>3.73</b>	4.53 : 3.58	4.53 : 3.58
		Cold Climate		4.38 : <b>3.58</b>	4.41 : <b>3.67</b>	5.28 : <b>3.61</b>	5.28 : 3.61	5.20 : 3.52	5.20 : <b>3.52</b>	4.81 : 3.40	4.81 : 3.40
Indoor Unit											
Dowor course			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz			
Power source			V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V
Dimensions	$H \times W \times D$	Indoor	mm	290 x 1,200 x 700	360 x 1,200 x 700	360 x 1,200 x 700	360 x 1,200 x 700	430 x 1,200 x 700	430 x 1,200 x 700	430 x 1,200 x 700	430 x 1,200 x 700
Net weight		Indoor / Panel	kg	31	36	37	37	41	41	50	50
Air volume (H/M/L)	_)	Cooling : Heating	L/s	367 / 334 / 267 : 367 / 334 / 267	501 / 434 / 367 : 501 / 434 / 367	668 / 584 / 484 : 668 / 584 / 484	668 / 584 / 484 : 668 / 584 / 484	835 / 768 / 601 : 835 / 768 / 601	835 / 768 / 601 : 835 / 768 / 601	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,0
External static pres	essure		Pa	70 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)	100 (50 - 150*2)	100 (50 - 150*2)
Sound pressure le	evel (H/M/L)	Cooling : Heating	dB(A)	43 / 41 / 40 : 43 / 41 / 40	45 / 44 / 43 : 45 / 44 / 43	48 / 46 / 44 : 48 / 46 / 44	48 / 46 / 44 : 48 / 46 / 44	49 / 47 / 45 : 49 / 47 / 45	49 / 47 / 45 : 49 / 47 / 45	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : <b>51</b>
Sound power level	el (H/M/L)	Cooling : Heating	dB	60 / 58 / 57 : 60 / 58 / 57	62 / 61 / 60 : 62 / 61 / 60	70 / 68 / 66 : 70 / 68 / 66	70 / 68 / 66 : 70 / 68 / 66	71 / 69 / 67 : 71 / 69 / 67	71 / 69 / 67 : 71 / 69 / 67	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73
Number of fan spe	eeds			3	3	3	3	3	3	3	3
Drain piping			mm	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
Outdoor Unit											
Bower course			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
Power source			V	230V 240V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)		Cooling : Heating	A	8.50 : 6.85 8.15 : 6.60	10.3 : 8.00 9.90 : 7.65	13.9 : 12.4 13.4 : 11.9	4.45 : <b>3.90</b> 4.25 : <b>3.70</b>	17.0 : 15.0 16.3 : 14.4	5.40 : 4.80 5.20 : 4.55	19.7 : <b>17.0</b> 18.9 : <b>16.3</b>	6.60 : <b>5.70</b> 6.40 :
Dimensions		$H \times W \times D$	mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight			kg	43	50	83	83	87	87	87	87
Air volume		Cooling : Heating	L/s	701 : <b>701</b>	746 : 766	1,219 : <b>1,219</b>	1,219 : <b>1,219</b>	1,369 : <b>1,336</b>	1,369 : <b>1,336</b>	1,402 : <b>1,369</b>	1,402 : 1,369
Sound pressure le	evel (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : 52 (50)	52 (50) : 52 (50)	55 (53) : 55 (53)	55 (53) : 55 (53)	56 (54) : 56 (54)	56 (54) : 56 (54)
Sound power level	el (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	67 (65) : 67 (65)	70 (68) : 70 (68)	70 (68) : 70 (68)	73 (71) : 73 (71)	73 (71) : 73 (71)	74 (72) : 74 (72)	74 (72) : 74 (72)
Piping connections	IS	Liquid / Gas	mm	Ø6.35 / Ø12.7*3	Ø6.35 / Ø15.88*4	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range		min max.	m	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
Elevation difference	ce (OU located low	er, OU located higher)	m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargele	less length		m	30	30	30	30	30	30	30	30
Refrigerant at ship	oping, Additional g	as amount	g	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/r
Operating range		Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 2			

В
5.0) 6.0)
<b>8</b> 5.0) 6.0) 0 - 51,200) 0 - 54,600)
Hz
700
1 : 1,002 / 835 / 701
1 : 1,002 / 835 / 701 D*2) : 51 / 49 / 47 : 73 / 71 / 69
: 51 / 49 / 47
: /3 / /1 / 69
Hz
40 5 50
.40 : <b>5.50</b> 70
70
E 4)
04) 70)
54) 72)

0.88	
45 (g/m)	
15 to 24	

Notes:

- Notes:
  In the case of nance X OFF
  In case it is necessary to indicate the air flow volume in (l/s), the value in (m<sup>3</sup>/min.) shall be multiplied by 16.7 and rounded down the decimal point.
  AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
  TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
  Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.

- Installed due to ambient conditions.
   <sup>\*1</sup> Outdoor power supply.
   <sup>\*2</sup> Not adjustable, refer to "Indoor Fan Performance" section of technical data.
   <sup>\*3</sup> For piping connection for 6.0kW unit, connect the gas socket tube (012.7-015.88) to the gas tubing side indoor unit and connect the liquid socket tube (06.35-09.21) to the liquid tubing side indoor unit.
   <sup>\*4</sup> For piping connection for 7.1.kW unit, connect the liquid socket tube (08.35-09.52) to the liquid tubing side indoor unit.

# **Indoor Unit** High Static Pressure e Ducted

High static and large airflow ducted for exceptional installation flexibility.



### Technical focus

- Easy installation with splittable chassis design
- Max. 200Pa static pressure setting\*1
- Design flexibility thanks to high static pressure and large air volume
- DC motor equipped
- \*1 In case of S-224PE3R5B

- Low power input
- Accurate temperature control to reduce cold drafts during operation
- Configurable air temperature control

### Easy Installation with Light Component

Compared to conventional models, the new Panasonic splittable ducted weighs in at approximately 10%\*2 lighter. This notion is further emphasised by the unit's ability to split into three components, the heaviest of which totals at 48kg. \*2 Comparison between S-180PE3R5B and S-180PE2R5B



### Dimensions of Each Component



Heat Exchanger \*3 The weight is for the 18.0kW model. (20.0/22.4kW : 48kg)



Fan

27kg\*4



Fan Casing \*4 The weight is for the 18.0/20.0kW model. (22.4kW : 29kg)

## Specifications of R32 Deluxe Model

S-180PE3R5B

S-200PE3R5B

S-224PE3R5B

Capacity				18.0kW	20.0kW	22.4kW
		Indoor Unit		S-180PE3R5B	S-200PE3R5B	S-224PE3R5B
Model Name		Outdoor Unit		U-180PZH2R8	U-200PZH2R8	U-224PZH2R8
Cooling capacity :			kW	18.0 (5.5-20.0) 20.0 (5.5-22.4)	20.0 (5.7-22.4) 22.4 (5.0-25.0)	22.4 (5.7-25.0) 25.0 (4.9-28.0)
Heating capacity			BTU/h	61,400 (18,800-68,200) 68,200 (18,800-76,400)	60,000 (19,400-76,400) 76,400 (17,100-85,300)	76,400 (19,400-85,300) 85,300 (16,700-95,500)
EER : COP			W/W	3.20 : <b>3.75</b>	3.33 : <mark>3.6</mark> 7	3.09 : 3.52
COP@H2 condition			W/W	2.90	2.70	2.60
Total power input		Cooling : Heating	kW	5.63 : 5.33	6.00 : <b>6</b> .10	7.24 : 7.10
		Hot Climate		4.35 : 5.00	4.33 : 4.35	3.99 : 4.53
	Residential	Average Climate		3.92 : 4.27	3.96 : <b>3.8</b> 7	3.67 : 3.86
		Cold Climate		4.02 : 3.74	4.03 : 3.43	3.76 : 3.38
TCSPF : HSPF		Hot Climate		4.75 : 5.03	4.64 : 4.35	4.27 : 4.65
	Commercial	Average Climate		4.77 : <b>4.62</b>	4.72 : <b>4.08</b>	4.30 : 4.27
		Cold Climate		5.11 : <b>4.12</b>	5.00 : <b>3.70</b>	4.56 : <b>3.77</b>
Indoor Unit						
-			Phase/Hz	1 Phase / 50Hz	1 Phase/ 50Hz	1 Phase / 50Hz
Power source			V	230V 240V	230V 240V	230V 240V
Current (rated)		Cooling : Heating	A	3.10 : 3.10 3.00 : 3.00	3.30 : 3.30 3.20 : 3.20	4.20 : 4.20 4.10 : 4.10
Dimensions		H × W × D	mm	486 x 1,456 x 916	486 x 1,456 x 916	486 x 1,456 x 916
Heat exchanger		H × W × D	mm	486 x 1,456 x 558	486 x 1,456 x 558	486 x 1,456 x 558
Fan		H × W × D	mm	377 x 1,150 x 427	377 x 1,150 x 427	377 x 1,150 x 427
Case		H × W × D	mm	434 x 1,178 x 360	434 x 1,178 x 360	434 x 1,178 x 360
Net weight			kg	85	86	88
Air volume		Cooling : Heating	L/s	1,200 / 1,050 / 883 1,200 / 1,050 / 883	1,200 / 1,050 / 883 1,200 / 1,050 / 883	1,400 / 1,200 / 983 1,400 / 1,200 / 983
External static press	ure		Pa	60 (60 - 150)	75 (75 - 180)	75 (75 - 200)
Sound pressure leve	el (H/M/L)	Cooling : Heating	dB(A)	46 / 44 / 41 : 46 / 44 / 41	46 / 44 / 41 : 46 / 44 / 41	47 / 45 / 42 : 47 / 45 / 4
Sound power level (	H/M/L)	Cooling : Heating	dB(A)	78 / 76 / 73 : 78 / 76 / 73	78 / 76 / 73 : 78 / 76 / 73	79 / 77 / 74 : 79 / 77 / 7
Number of fan spee	ds			3	3	3
Drain pipe size			mm	VP-25	VP-25	VP-25
Outdoor Unit						
Devuer eeuro			Phase/Hz	3 Phase / 50Hz	3 Phase / 50Hz	3 Phase / 50Hz
Power source			V	400V 415V	400V 415V	400V 415V
Current (rated)		Cooling : Heating	A	8.00 : 7.55 7.70 : 7.25	8.45 : 8.60 8.15 : 8.30	9.95 : 9.75 9.60 : 9.40
Dimensions		H × W × D	mm	1,500 x 980 x 370	1,500 x 980 x 370	1,500 x 980 x 370
Net weight			kg	115	128	128
Air volume		Cooling : Heating	L/s	2,733 : 2,733	2,667 : 2,667	2,667 : 2,667
Sound pressure leve	l (Silent mode)	Cooling : Heating	dB(A)	58 (56) : 60 (58)	58 (56) : 62 (60)	58 (56) : 62 (60)
Sound power level (	Silent mode)	Cooling : Heating	dB(A)	76 (74) : 78 (76)	77 (75) : 81 (79)	77 (75) : 81 (79)
Piping connections		Liquid / Gas	mm	Ø9.52 / Ø19.05*5	Ø12.70 / Ø19.05*5	Ø12.70 / Ø19.05*5
Pipe length		min max.	m	5 - 75	5 - 60	5 - 60
Elevation difference	(OU located lower,	OU located higher)	m	30, 30	30, 30	30, 30
Maximum chargeles	s length		m	30	30	30
Refrigerant at shippi		amount	g	R32 3,400 / 45/60*6 (g/m)	R32 5,200 / 80 (g/m)	R32 5,200 / 80 (g/m)
Operation ranges		Cooling : Heating	°C	-15 to 46 : -20 to 24	-15 to 46 : -20 to 24	-15 to 46 : -20 to 24

- In case it is necessary to indicate the air flow volume in (I/s), the value in (m<sup>3</sup>/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
  TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
  Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- \*5 Tubing size is Ø25.40 when the piping length is over 50m for U-180PZH2R8 and 30m for U-200PZH2R8 and U-224PZH2R8.
- Also, joint needs to be prepared by the site for U-180PZH2R8 when the piping length is over 50m. Please refer to technical documents for more details. \*6 Additional gas amount is 45g/m when the piping length is under 50m and 60g/m when the piping length is over 50m.




## **Indoor Unit** High Static Pressure Adaptive Ducted

Control all aspects of your environment with exceptional performance and quiet operation. Vertical installation flexibility offers the perfect solution when ceiling heights are restricted.







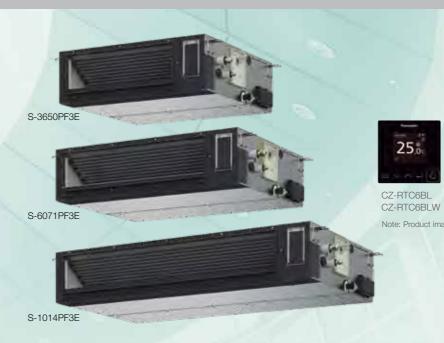


### **Technical focus**

- Space saving 250mm height
- DC fan motor for variable external static pressure control
- Easy to install and maintain

- Accurate temperature control to reduce cold drafts during operation
- Configurable air temperature control

### Variable external static pressure control

Optimal airflow set-up is possible for different ducting design and conditions.



For long ducting or for usage with high density filter

Note: Please refer to technical documents for detail.


### Powerful 150Pa external static pressure in an industry-leading vertical installation design

Delivering static pressure up to 150Pa external static pressure, the industry-leading horizontal/ vertical design offers the power you need in a compact form factor.

### Selectable air inlet position

A removable panel allows air inlet position to be adjusted to enable rear or bottom entry, depending on ductwork installation.



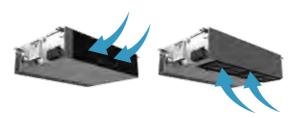

### Built-in Drain pump (DC motor pump)

### Space saving height of 250mm for all models

250mm standardised height provides easy and uniform installation for models with different capacities, especially when ceiling heights are restricted.

### Discharge air temperature control

- Possible to control discharge air temperature for accurate room temperature control. • Possible to reduce cold drafts during heating operation.
- Note: Before spec-in, please consult with an authorised Panasonic dealer.

### System example

An inspection port (450 mm x 450 mm or larger) is required at the lower side of the indoor unit body.

### More powerful drain pump

Using a high-lift built-in drain pump, drain piping can be elevated up to 701 mm from the base of the unit.

### High Static Pressure Adaptive Ducted













CZ-RTC5B


Note: Product image not to scale.


CZ-RTC4

CZ-CAPWFC1 CZ-CENSC1

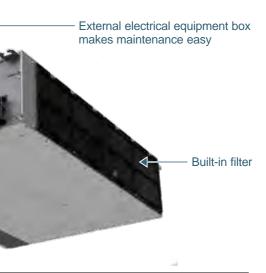



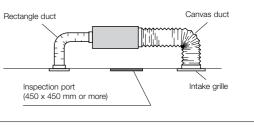



## Indoor Unit: High Static Pressure Adaptive Ducted

## Specifications of R32 Deluxe Model

Capacity				6.8kW	9.5kW		12.1kW		13.4kW	
Madal Marris		Indoor Unit		S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E
Model Name		Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8
Cooling capacity :			kW	6.8 (2.2 - 7.8) 7.5 (2.0 - 9.0)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)	12.1 (3.2 - 13.6) 13.5 (3.2 - 15.4)	12.1 (3.2 - 13.6) 13.5 (3.2 - 15.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)
Heating capacity			BTU/h	23,200 (7,500 - 26,600) 25,600 (6,800 - 30,700)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)	41,300 (10,900 - 46,400) 46,100 (10,900 - 52,500)	41,300 (10,900 - 46,400) 46,100 (10,900 - 52,500)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)
EER : COP			W/W	3.74 : 4.03	4.17 : 3.97	4.17 : 3.97	3.58 : 3.46	3.58 : 3.46	3.38 : 3.44	3.38 : 3.44
COP@H2 condition	1		W/W	2.96	2.90	2.90	2.60	2.60	2.68	2.68
Total power input		Cooling : Heating	kW	1.82 : 1.86	2.28 : 2.72	2.28 : 2.72	3.38 : 3.90	3.38 : 3.90	3.96 : 4.51	3.96 : 4.51
		Hot Climate		5.40 : 5.49	5.93 : 5.57	5.93 : <b>5.57</b>	5.37 : 5.32	5.37 : 5.32	4.98 : 4.97	4.98 : 4.97
	Residential	Average Climate		4.75 : 4.67	5.21 : 4.70	5.21 : 4.70	4.86 : 4.32	4.86 : 4.32	4.55 : <b>4.15</b>	4.55 : <b>4.15</b>
TOODE		Cold Climate		4.82 : 4.13	5.29 : 4.21	5.29 : 4.21	5.03 : 3.79	5.03 : 3.79	4.72 : 3.65	4.72 : 3.65
TCSPF : HSPF		Hot Climate		6.02 : 5.54	6.59 : 5.61	6.59 : <b>5.61</b>	5.95 : 5.44	5.95 : 5.44	5.49 : 5.05	5.49 : 5.05
	Commercial	Average Climate		6.25 : 5.08	6.75 : 5.13	6.75 : 5.13	6.30 : 4.87	6.30 : 4.87	5.74 : 4.58	5.74 : 4.58
		Cold Climate		6.76 : <b>4.56</b>	7.28 : 4.65	7.28 : 4.65	6.88 : 4.31	6.88 : 4.31	6.25 : 4.08	6.25 : 4.08
Indoor Unit										
5			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
Power source			V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V
Dimension	H x W x D	Indoor	mm	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 X 1,400 X 730	250 X 1,400 X 730	250 X 1,400 X 730
Net weight		Indoor	kg	30	39	39	39	39	39	39
Air volume (H/M/L)		Cooling : Heating	L/s	350 / 317 / 250 : 350 / 317 / 250	534 / 434 / 350 : 534 / 434 / 350	534 / 434 / 350 : 534 / 434 / 350	567 / 484 / 384 : 567 / 484 / 384	567 / 484 / 384 : 567 / 484 / 384	601 / 534 / 417 : 601 / 534 / 417	601 / 534 / 417 : 601 / 534 / 417
External static press	sure		Pa	30 (10 - 150)	40 (10 - 150)	40 (10 - 150)	50 (10 - 150)	50 (10 - 150)	50 (10 - 150)	50 (10 - 150)
Sound pressure leve	el (H/M/L)	Cooling : Heating	dB(A)	30 / 26 / 23 : 30 / 26 / 23	33 / 29 / 25 : 33 / 29 / 25	33 / 29 / 25 : 33 / 29 / 25	35 / 31 / 27 : 35 / 31 / 27	35 / 31 / 27 : 35 / 31 / 27	39 / 35 / 29 : 39 / 35 / 29	39 / 35 / 29 : 39 / 35 / 29
Sound power level (	(H/M/L)	Cooling : Heating	dB	53 / 49 / 46 : 53 / 49 / 46	56 / 52 / 48 : 56 / 52 / 48	56 / 52 / 48 : 56 / 52 / 48	58 / 54 / 50 : 58 / 54 / 50	58 / 54 / 50 : 58 / 54 / 50	62 / 58 / 52 : 62 / 58 / 52	62 / 58 / 52 : 62 / 58 / 52
Number of fan spee	eds			5	5	5	5	5	5	5
Drain piping			mm	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Outdoor Unit										
Deveryor			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
Power source			V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)		Cooling : Heating	A	8.60 : 8.60 8.25 : 8.35	10.8 : 12.7 10.3 : 12.2	3.60 : 4.30 3.50 : 4.15	15.8 : 18.2 15.1 : 17.5	5.30 : 6.10 5.15 : 5.90	18.7 : 21.1 17.9 : 20.2	6.30 : 7.15 6.05 : 6.90
Dimensions		H × W × D	mm	996 x 940 x 340	1,416 × 940 × 340	1,416 × 940 × 340	1,416 × 940 × 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340
Net weight			kg	66	99	99	99	99	99	99
Air volume		Cooling : Heating	L/s	1,018 : 1,002	1,970 : <b>1,803</b>	1,970 : <b>1,803</b>	2,087 : 1,870	2,087 : 1,870	2,154 : <b>1,937</b>	2,154 : <b>1,937</b>
Sound pressure leve	el (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)
Sound power level (	(Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)	69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)
Piping connections		Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range		min max.	m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85
Elevation difference	OU located low	er, OU located higher)	m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeles	ss length	0,	m	30	30	30	30	30	30	30
Refrigerant at shipp	oing / Additional g	gas amount	g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operation ranges		Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

## Specifications of R32 Compact Model

Capacity			3.4kW	4.6kW	5.7kW	6.8kW	9.5kW		12.1kW		13.4kW	
	Indoor Unit		S-3650PF3E	S-3650PF3E	S-6071PF3E	S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E
Model Name	Outdoor Unit		U-36PZ3R5	U-50PZ3R5	U-60PZ3R5	U-71PZ3R5	U-100PZ3R5	U-100PZ3R8	U-125PZ3R5	U-125PZ3R8	U-140PZ3R5	U-140PZ3R8
		1.1.4.(	3.4 (1.3 - 4.0)	4.6 (1.5 - 5.3)	5.7 (2.0 - 6.3)	6.8 (2.6 - 7.7)	9.5 (3.0 - 11.4)	9.5 (3.0 - 11.4)	12.1 (3.2 - 13.5)	12.1 (3.2 - 13.5)	13.4 (3.3 - 15.0)	13.4 (3.3 - 15.0)
Cooling capacity :		kW	3.6 (1.3 - 4.6)	5.0 (1.5 - 5.9)	5.7 (1.8 - 7.0)	6.8 (2.1 - 8.1)	9.5 (3.0 - 13.5)	9.5 (3.0 - 13.5)	12.1 (3.3 - 15.0)	12.1 (3.3 - 15.0)	13.4 (3.4 - 16.0)	13.4 (3.4 - 16.0)
Heating capacity		BTU/h	11,600 (4,400 - 13,600)	15,700 (5,100 - 18,100)	19,400 (6,800 - 21,500)	23,200 (8,900 - 26,300)	32,400 (10,200 - 38,900)	32,400 (10,200 - 38,900)	41,300 (10,900 - 46,100)	41,300 (10,900 - 46,100)	45,700 (11,300 - 51,200)	45,700 (11,300 - 51,200)
		BIU/N	12,300 (4,400 - 15,700)	17,100 (5,100 - 20,100)	19,400 (6,100 - 23,900)	23,200 (7,200 - 27,600)	32,400 (10,200 - 46,100)	32,400 (10,200 - 46,100)	41,300 (11,300 - 51,200)	41,300 (11,300 - 51,200)	45,700 (11,600 - 54,600)	45,700 (11,600 - 54,600)
EER : COP		W/W	3.78 : 4.29	3.19 : 3.62	3.54 : 4.04	3.18 : 4.00	3.57 : <b>4.09</b>	3.57 : 4.09	3.40 : 3.56	3.40 : 3.56	3.16 : 3.76	3.16 : 3.76
COP@H2 condition		W/W	3.09	3.33	3.09	2.84	2.88	2.88	2.82	2.82	2.73	2.73
Total power input	Cooling : Heating	kW	0.900 : 0.840	1.44 : 1.38	1.61 : 1.41	2.14 : 1.70	2.66 : 2.32	2.66 : 2.32	3.56 : 3.40	3.56 : <mark>3.40</mark>	4.24 : 3.56	4.24 : 3.56
	Hot Climate		5.11 : 5.05	4.67 : 5.09	5.19 : <b>5.76</b>	4.57 : <b>5.26</b>	5.24 : <b>5.04</b>	5.24 : <b>5.04</b>	4.90 : <b>5.01</b>	4.90 : <b>5.01</b>	4.75 : 4.93	4.75 : <b>4.93</b>
Residential	Average Climate		4.36 : 4.57	4.23 : 4.31	4.67 : 4.83	4.23 : 4.42	4.52 : <b>4.52</b>	4.52 : <b>4.52</b>	4.42 : <b>4.21</b>	4.42 : <b>4.21</b>	4.33 : 4.18	4.33 : 4.18
TCSPF : HSPF	Cold Climate		4.36 : 4.06	4.29 : 3.79	4.82 : 4.13	4.34 : 3.82	4.62 : 4.06	4.62 : 4.06	4.52 : 3.68	4.52 : 3.68	4.47 : 3.63	4.47 : 3.63
	Hot Climate		5.77 : <b>5.01</b>	5.22 : 5.13	5.69 : 5.77	5.01 : 5.33	5.87 : <b>4.99</b>	5.87 : 4.99	5.40 : <b>5.06</b>	5.40 : <b>5.06</b>	5.26 : 5.01	5.26 : 5.01
Commercia	Average Climate		5.84 : 4.72	5.96 : <b>4.69</b>	6.00 : <b>5.23</b>	5.53 : <b>4.86</b>	5.91 : <b>4.68</b>	5.91 : <b>4.68</b>	5.81 : <b>4.60</b>	5.81 : <b>4.60</b>	5.78 : <b>4.59</b>	5.78 : <b>4.59</b>
	Cold Climate		6.41 : 4.31	6.69 : 4.19	6.54 : <b>4.60</b>	6.11 : 4.27	6.49 : <b>4.31</b>	6.49 : <b>4.31</b>	6.36 : 4.10	6.36 : 4.10	6.40 : <b>4.05</b>	6.40 : <b>4.05</b>
Indoor Unit												
Power source		Phase/Hz	z 1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
Fower source		V	230V   240V	230V   240V	230V   240V	230V   240V						
Dimensions $H \times W \times D$	Indoor	mm	250 x 800 x 730	250 x 800 x 730	250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Net weight	Indoor	kg	25	25	30	30	39	39	39	39	39	39
Air volume (H/M/L)	Cooling : Heating	L/s	233 / 217 / 167 : 233 / 217 / 167	267 / 250 / 200 : 267 / 250 / 200	350 / 317 / 250 : 350 / 317 / 250	350 / 317 / 250 : 350 / 317 / 250	534 / 434 / 350 : 534 / 434 / 350	534 / 434 / 350 : 534 / 434 / 350	567 / 484 / 384 : 567 / 484 / 384	567 / 484 / 384 : 567 / 484 / 384	601 / 534 / 417 : 601 / 534 / 417	601 / 534 / 417 : 601 / 534 / 417
External static pressure	· · · ·	Pa	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	40 (10 - 150)	40 (10 - 150)	50 (10 - 150)	50 (10 - 150)	50 (10 - 150)	50 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	30 / 27 / 22 : 30 / 27 / 22	34 / 30 / 25 : 34 / 30 / 25	30 / 26 / 23 : 30 / 26 / 23	30 / 26 / 23 : 30 / 26 / 23	33 / 29 / 25 : 33 / 29 / 25	33 / 29 / 25 : 33 / 29 / 25	35 / 31 / 27 : 35 / 31 / 27	35 / 31 / 27 : 35 / 31 / 27	39 / 35 / 29 : 39 / 35 / 29	39 / 35 / 29 : 39 / 35 / 29
Sound power level (H/M/L)	Cooling : Heating	dB	53 / 50 / 45 : 53 / 50 / 45	57 / 53 / 48 : 57 / 53 / 48	53 / 49 / 46 : 53 / 49 / 46	53 / 49 / 46 : 53 / 49 / 46	56 / 52 / 48 : 56 / 52 / 48	56 / 52 / 48 : 56 / 52 / 48	58 / 54 / 50 : 58 / 54 / 50	58 / 54 / 50 : 58 / 54 / 50	62 / 58 / 52 : 62 / 58 / 52	62 / 58 / 52 : 62 / 58 / 52
Number of fan speeds			5	5	5	5	5	5	5	5	5	5
Drain piping		mm	VP-20	VP-20	VP-20	VP-20						
Outdoor Unit												
Power source		Phase/Hz	z 1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
ower source		V	230V   240V	400V   415V	230V   240V	400V   415V	230V   240V	400V   415V				
Current (rated)	Cooling : Heating	A	4.00 : 3.80   3.85 : 3.55	6.40 : 6.20   6.10 : 5.95	7.15 : 6.25   6.85 : 6.00	9.50 : 7.55   9.10 : 7.25	12.7 : 11.1   12.2 : 10.6	4.20 : 3.70   4.05 : 3.55	16.5 : <b>15.7</b>   15.8 : <b>15.1</b>	5.45 : 5.20   5.25 : 5.05	19.6 : 16.5   18.8 : 15.8	6.50 : 5.45   6.30 : 5.25
Dimensions	$H \times W \times D$	mm	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	31	35	43	50	83	83	87	87	87	87
Air volume	Cooling : Heating	L/s	561 : <b>567</b>	546 : <b>532</b>	701 : <b>701</b>	746 : <b>766</b>	1,219 : <b>1,219</b>	1,219 : <b>1,219</b>	1,369 : <b>1,336</b>	1,369 : <b>1,336</b>	1,402 : <b>1,369</b>	1,402 : <b>1,369</b>
Sound pressure level (Silent mode	e) Cooling : Heating	dB(A)	48 (46) : 49 (47)	48 (46) : 49 (47)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : <b>52 (50)</b>	52 (50) : <b>52 (50)</b>	55 (53) : 55 (53)	55 (53) : 55 (53)	56 (54) : 56 (54)	56 (54) : 56 (54)
Sound power level (Silent mode)	Cooling : Heating	dB	66 (64) : <b>67 (65)</b>	66 (64) : 67 (65)	66 (64) : <b>67 (65)</b>	67 (65) : 67 (65)	70 (68) : 70 (68)	70 (68) : 70 (68)	73 (71) : 73 (71)	73 (71) : 73 (71)	74 (72) : 74 (72)	74 (72) : 74 (72)
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7*1	Ø6.35 / Ø15.88*2	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min max.	m	3 - 20	3 - 30	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
Elevation difference (OU located le	ower, OU located higher)	m	15, 15	15, 15	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeless length		m	7.5	10	30	30	30	30	30	30	30	30
Refrigerant at shipping, Additiona		g	R32 870 / 10 (g/m)	R32 1,140 / 15 (g/m)	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
Operating range	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24						

## High Static Pressure Adaptive Ducted

- Notes: In the case of standard installation (Horizontal installation in the ceiling, rear side air intake) • In the case of nanoe X OFF
- In the case of nance X OFF
  In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
  AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
  TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
  Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
  H : High at setting 5 stage (Level 5), M : Middle at setting 5 stage (Level 3), L : Low at setting 5 stage (Level 1) Noise of L is indicated by the values at FAN mode.

- \*1 For pipining connection for 6.0kW unit, connect the gas socket tube (Ø12.7-015.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.
   \*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

# **Indoor Unit Ultra Slim Ducted**

With a height of only 200 mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for apartments and hotels.



### Technical focus

- Space saving 200mm height
- Rear or Bottom Return Air Options
- Built-in Drain Pump
- DC fan motor greatly reduces power consumption
- Easy maintenance and service by external electrical box
- 40 Pa static pressure enables ductwork to be fitted.


### Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



### Drain pump with increased power

Using the built-in high-lift drain pump, the drain piping rise height can be increased to 653 mm from the lower surface of the body.



### Specifications

CS-Z25UD3RAW CS-Z35UD3RAW

CS-Z50UD3RAW

CS-Z60UD3RAW

Capacity			2.5KW	3.6KW	5.0KW	6.0KW
model Name	Indoor Unit		CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW
model Name	Outdoor Unit		CU-Z25UBRA	CU-Z35UBRA	CU-Z50UBRA	CU-Z60UBRA
Cooling capacity :		kW	2.60 (0.85 - 3.20) 3.30 (0.85 - 4.90)	3.70 (0.85 - 4.00) 4.20 (0.85 - 5.60)	5.00 (0.90 - 5.70) 6.10 (0.90 - 7.20)	5.60 (0.90 - 6.50) 7.00 (0.90 - 8.00)
Heating capacity		BTU/h	8,870 (2,900 - 10,900) 11,300 (2,900 -16,700)	12,600 (2,900 - 13,600) 14,300 (2,900 -19,100)	17,100 (3,070 - 19,400) 20,800 (3,070 - 24,600)	19,100 (3,070 - 22,200) 23,900 (3,070 - 27,300)
EER : COP		W/W	4.48 : <b>4.23</b>	3.85 : <b>4.08</b>	3.57 : <b>3.63</b>	3.29 : <b>3.2</b> 4
Power input (min - max)	Cooling : Heating	kW	0.58 (0.24 - 0.85) : 0.78 (0.23 - 1.25)	0.96 (0.24 - 1.12) : 1.03 (0.23 - 1.57)	1.40 (0.26 - 1.78) : 1.68 (0.26 - 2.20)	1.70 (0.26 - 2.30) : 2.16 (0.26 - 2.6
Indoor Unit						
D		Phase/Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz
Power source		V	230V   240V	230V   240V	230V   240V	230V   240V
Dimensions	$H \times W \times D$	mm	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640
Net weight		kg	19	19	19	19
Air volume	Cooling : Heating	L/s	175 : <b>175</b>	187 : <b>187</b>	255 : <b>255</b>	262 : 262
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	33 / 27 / 24 : 34 / 27 / 24	33 / 26 / 23 : 35 / 27 / 24	39 / 29 / 26 : <b>39 / 30 / 2</b> 7	41 / 30 / 27 : 41 / 32 / 29
Sound power level (H/M/L)	Cooling : Heating	dB(A)	49 / 43 / 40 : 50 / 43 / 40	49 / 42 / 39 : 51 / 43 / 40	55 / 45 / 42 : 55 / 46 / 43	57 / 46 / 43 : 57 / 48 / 45
Outdoor Unit						
		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
Power source		V	230V   240V	230V   240V	230V   240V	230V   240V
Current (rated)	Cooling : Heating	A	2.80 : 3.50   2.70 : 3.40	4.30 : 4.70   4.20 : 4.50	6.30 : 7.40   6.10 : 7.20	7.50 : <b>9.50</b>   7.30 : <b>9.30</b>
Dimensions	$H\timesW\timesD$	mm	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320
Net weight		kg	33	35	42	43
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.70	Ø6.35 / Ø12.70
Pipe length	min max.	m	3 - 20	3 - 20	3 - 30	3 - 30
Elevation difference		m	15	15	20	20
Operation ranges	Cooling : Heating	°C	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24

Notes: The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823 • Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB • Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB • Indoor and outdoor sound levels are determined in an anechoic chamber and the advented to the unit is installed due to ambient conditions • Order the advented by the state of the determined in an anechoic chamber and the advented to advente the unit is installed due to ambient conditions

Sound levels are measured in default status which is rear return air, when changing to bottom return air, sounds levels may be higher.
 Ultra Slim Ducted is not supported by PAC Smart Connectivity+.

\*1 If you connect WLAN adaptor (CZ-TACG1) to an indoor unit other than wall mounted type and operate from the smartphone with Panasonic Comfort Cloud App, airflow direction may not be operated as it is shown on the display





Note: Product image not to scale



Self-diagnosing

Function

Automatic

Fan

Operation

# Indoor Unit 4-WAY Cassette

Featuring uniform cooling, easy installation, and with a sleek exterior, this unit is the perfect match for all commercial applications.

AUTO

Intelligent Auto Swing 7

Automatic

Restart

Function





Comfort/Quiet

9.5% \*

5

Panasonic in-house data

1 5 level fan mode: Except for CZ-RTC4



### **Technical focus**

DRY

Dry mode

- Compact design
- Low sound levels
- DC fan motor for increased efficiency
- Powerful drain pump gives 850 mm lift

### 360° Wide & Comfortable Airflow


Our design features wide-angle outlets and flaps that were designed through expert mechanics and prototype tests. Air from the center is sent farther and the air blown out of the larger, side flaps spreads throughout the room. The air comes from all for sides of the unit and expands gently in a circle centered on the indoor unit.

Temperature distribution by thermograph (cooling operation)

Simulation conditions: P140 4-WAY Ceiling Mounted Cassette type in cooling mode / Floor area of 225 m²/ Ceiling height of 3 m

### Wide Flap

Adding a sub flap and widening the main flap have reduced turbulence and increased airflow. Also, setting the jetting port at a wider angle allows the airflow to reach the corners of the room more quickly.

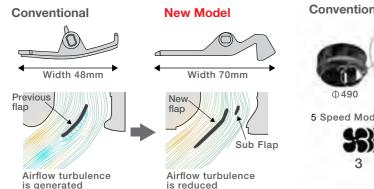

### \_\_\_\_\_

1m

360° Wide

DP

Built-in

Drain Pump

Auto Swing (Auto Flap DC motor

DC Motor

Lightweight design

Fresh air knockout

Industry's leading in the 140PU class.

Branch duct connection

Ample airflow: 600 l/s


• Optional air-intake plenum CZ-FDU3

**3D Turbo Fan** Using a twisted 3D blade made the unit slimmer and more compact, while also increasing the airflow. A 5-Speed mode allows the airflow to be adjusted in 5 steps to suit the situation.



## High-Ceiling Installation (Up to 5 m for 10.0kW+ models)

The units can be installed in rooms with high ceilings, where they provide ample floor-level heating in the winter. (See ceiling height guidelines below.)

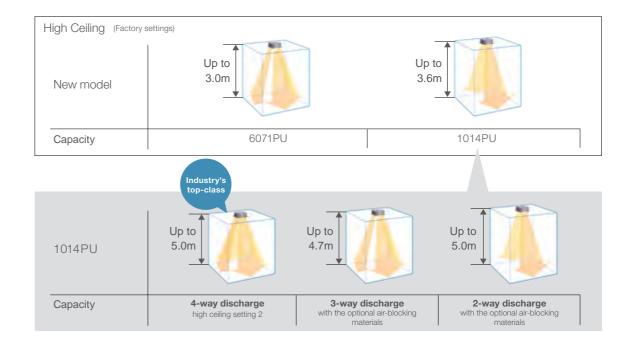

### Ceiling height guidelines

*3 settings	4-way discharge		3-way	2-way	
Indoor unit	Standard (Factory setting)	High ceiling setting 1	High ceiling setting 2	discharge (optional air- blocking materials)	discharge (optional air-blocking materials) *4
6071PU	3.0	3.3	3.6	3.8	4.2
1014PU	3.6	4.3	5.0	4.7	5.0

\*<sup>3</sup> When using the unit in a configuration other than the factory settings, it is necessary to make settings on site to increase airflow.
\*<sup>4</sup> Use air-blocking materials (CZ-CFU3) to completely block two discharge outlets for 2-way airflow.

42

4-WAY Cassette



## Indoor Unit: 4-WAY Cassette

## Specifications of R32 Deluxe Model

Capacity			7.1kW	10.0kW		12.5kW		14.0kW	
	Indoor Unit		S-6071PU3E	S-1014PU3E	S-1014PU3E		S-1014PU3E	S-1014PU3E	S-1014PU3E
lodel Name	Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8
lodel Name	Panel		Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A
ooling capacity		kW	7.1 (2.2 - 9.0) 8.0 (2.0 - 9.0)	10.0 (3.1 - 12.5) 11.2 (3.1 - 14.0)	10.0 (3.1 - 12.5) 11.2 (3.1 - 14.0)	12.5 (3.2 - 14.0) 14.0 (3.2 - 16.0)	12.5 (3.2 - 14.0) 14.0 (3.2 - 16.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)
eating capacity		BTU/h	24,200 (7,500 - 30,700) 27,300 (6,800 - 30,700)	34,100 (10,600 - 42,700) 38,200 (10,600 - 47,800)	34,100 (10,600 - 42,700) 38,200 (10,600 - 47,800)	42,700 (10,900 - 47,800) 47,800 (10,900 - 54,600)	42,700 (10,900 - 47,800) 47,800 (10,900 - 54,600)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)
ER : COP		W/W	4.06 : 4.30	4.41 : 5.00	4.41 : 5.00	3.80 : 4.61	3.80 : 4.61	3.41 : 4.30	3.41 : 4.30
DP@H2 condition		W/W	2.60	2.90	2.90	2.70	2.70	2.50	2.50
tal power input	Cooling : Heating	kW	1.75 : 1.86	2.27 : 2.24	2.27 : 2.24	3.29 : 3.04	3.29 : 3.04	4.11:3.72	4.11 : 3.72
	Hot Climate		5.86 : 5.68	6.24 : 5.68	6.24 : 5.68	5.71 : 5.63	5.71 : 5.63	5.35 : 5.60	5.35 : <b>5.60</b>
Residential	Average Climate		5.10 : 4.77	5.53 : 5.15	5.53 : 5.15	5.20 : 4.88	5.20 : 4.88	4.93 : 4.71	4.93 : 4.71
	Cold Climate		5.16 : 4.11	5.64 : 4.63	5.64 : 4.63	5.39 : 4.28	5.39 : 4.28	5.17 : 4.01	5.17 : 4.01
SPF : HSPF	Hot Climate		6.58 : 5.81	6.96 : 5.66	6.96 : 5.66	6.36 : 5.74	6.36 : 5.74	5.96 : 5.76	5.96 : 5.76
Commercial	Average Climate		6.83 : 5.30	7.09 : 5.35	7.09 : 5.35	6.72 : 5.32	6.72 : 5.32	6.43 : 5.25	6.43 : <b>5.25</b>
	Cold Climate		7.41 : 4.63	7.69 : 4.92	7.69 : 4.92	7.37 : 4.72	7.37 : 4.72	7.10 : 4.53	7.10 : 4.53
door Unit									
wer source		Phase/Hz	1 Phase / 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz
wer source		V	230V   240V	230V   240V	230V   240V	230V   240V	230V   240V	230V   240V	230V   240V
mensions $H \times W \times D$	Indoor	mm	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
et weight	Indoor / Panel	kg	20 / 5	25 / 5	25 / 5	25 / 5	25 / 5	25 / 5	25 / 5
volume (H/M/L)	Cooling : Heating	L/s	367 / 267 / 217 : 367 / 267 / 217	601 / 434 / 300 : 601 / 434 / 300	601 / 434 / 300 : 601 / 434 / 300	617 / 450 / 317 : 617 / 450 / 317	617 / 450 / 317 : 617 / 450 / 317	634 / 484 / 334 : 634 / 484 / 334	634 / 484 / 334 : 634 / 484
und pressure level (H/M/L)	Cooling : Heating	dB(A)	37 / 31 / 28 : 37 / 31 / 28	45 / 38 / 32 : 45 / 38 / 32	45 / 38 / 32 : 45 / 38 / 32	46 / 39 / 33 : 46 / 39 / 33	46 / 39 / 33 : 46 / 39 / 33	47 / 40 / 34 : 47 / 40 / 34	47 / 40 / 34 : 47 / 40 / 3
ound power level (H/M/L)	Cooling : Heating	dB	52 / 46 / 43 : 52 / 46 / 43	60 / 53 / 47 : 60 / 53 / 47	60 / 53 / 47 : 60 / 53 / 47	61 / 54 / 48 : 61 / 54 / 48	61 / 54 / 48 : 61 / 54 / 48	62 / 55 / 49 : 62 / 55 / 49	62 / 55 / 49 : 62 / 55 / 4
umber of fan speeds			5	5	5	5	5	5	5
ain pipe size		mm	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
itdoor Unit									
ower source		Phase/Hz	1 Phase / 50Hz	1 Phase/ 50Hz	3 Phase/ 50Hz	1 Phase/ 50Hz	3 Phase/ 50Hz	1 Phase/ 50Hz	3 Phase/ 50Hz
		V	230V   240V	230V   240V	400V   415V	230V   240V	400V   415V	230V   240V	400V   415V
irrent (rated)	Cooling : Heating	A	8.25 : 8.70   7.95 : 8.35	10.7 : 10.6   10.3 : 10.1	3.60 : 3.55   3.45 : 3.40	15.4 : 14.2   14.7 : 13.6	5.15 : 4.80   5.00 : 4.65	19.2 : 17.4   18.4 : 16.7	6.45 : <b>5.90</b>   6.20 : <b>5.6</b> 5
mension $H \times W \times D$		mm	996 x 940 x 340	1,416 × 940 × 340					
et weight		kg	66	99	99	99	99	99	99
r volume	Cooling : Heating	m³/min	1,018 : 1,002	1,970 : <b>1,803</b>	1,970 : 1,803	2,087 : 1,870	2,087 : 1,870	2,154 : 1,937	2,154 : 1,937
und pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : <b>52 (50)</b>	52 (50) : <b>52 (50)</b>	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)
und power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : <mark>68 (66)</mark>		69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)
ping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88		Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
pe length range	min max.	m	5 - 50	5 - 85	5 - 85		5 - 85	5 - 85	5 - 85
evation difference (OU located lower	r, OU located higher)	m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
aximum chargeless length		m	30	30	30	30	30	30	30
efrigerant at shipping, Additional gas	s amount	g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operating range	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

## Specifications of R32 Compact Model

Capacity			6.0kW	7.1kW	10.0kW		12.5kW		14.0kW	
	Indoor Unit		S-6071PU3E	S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E
lodel Name	Outdoor Unit		U-60PZ3R5	U-71PZ3R5	U-100PZ3R5	U-100PZ3R8	U-125PZ3R5	U-125PZ3R8	U-140PZ3R5	U-140PZ3R8
iodel Name	Panel	· · · · · · · · · · · · · · · · · · ·	Standard type:CZ-KPU3H	Standard type:CZ-KPU3H	Standard type:CZ-KPU3H	Standard type:CZ-KPU3H	Standard type:CZ-KPU3H	Standard type:CZ-KPU3H	Standard type:CZ-KPU3H	Standard type:CZ-KPU3H
			ECONAVI type:CZ-KPU3A	ECONAVI type:CZ-KPU3A	ECONAVI type:CZ-KPU3A	ECONAVI type:CZ-KPU3A	ECONAVI type:CZ-KPU3A	ECONAVI type:CZ-KPU3A	ECONAVI type:CZ-KPU3A	ECONAVI type:CZ-KPU3
		kW	6.0 (2.0-7.1)	7.1 (2.6 - 7.7)	10.0 (3.0 - 11.5)	10.0 (3.0-11.5)	12.5 (3.2 - 13.5)	12.5 (3.2 - 13.5)	14.0 (3.3 - 15.0)	14.0 (3.3 - 15.0)
Cooling capacity			6.0 (1.8 - 7.0)	7.1 (2.1 - 8.1)	10.0 (3.0 - 14.0)	10.0 (3.0-14.0)	12.5 (3.3 - 15.0)	12.5 (3.3 - 15.0)	14.0 (3.4 - 16.0)	14.0 (3.4 - 16.0)
leating capacity		BTU/h	20,500 (6,800 - 24,200) 20,500 (6,100 - 23,900)	24,200 (8,900 - 26,300) 24,200 (7,200 - 27,600)	34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)	34,100 (10,200-39,200) 34,100 (10,200 - 47,800)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	47,800 (11,300 - 51,200) 47,800 (11,600 - 54,600)	47,800 (11,300 - 51,200) 47,800 (11,600 - 54,600)
ER : COP		W/W	3.82 : 4.48	3.40 : 4.23	3.82 : 4.93	3.82 : 4.93	3.58 : 4.43	3.58 : 4.43	3.23 : 4.18	3.23 : 4.18
OP@H2 condition		W/W	3.19	3.30	3.27	3.27	2.88	2.88	2.70	2.70
otal power input	Cooling : Heating	kW	1.57 : <b>1.34</b>	2.09 : 1.68	2.62 : 2.03	2.62 : 2.03	3.49 : 2.82	3.49 : 2.82	4.34 : 3.35	4.34 : 3.35
	Hot Climate		5.65 : 6.69	5.12 : <b>5.75</b>	5.78 : <b>5.43</b>	5.78 : <b>5.43</b>	5.27 : 5.56	5.27 : 5.56	4.94 : 5.52	4.94 : 5.52
Residential	Average Climate		5.04 : 5.44	4.64 : 4.85	5.00 : <b>5.06</b>	5.00 : <b>5.06</b>	4.73 : 4.87	4.73 : 4.87	4.54 : 4.72	4.54 : 4.72
CSPF : HSPF	Cold Climate		5.23 : 4.45	4.83 : 4.14	5.10 : <b>4.62</b>	5.10 : 4.62	4.85 : <b>4.17</b>	4.85 : 4.17	4.69 : <b>3.97</b>	4.69 : <b>3.97</b>
	Hot Climate		6.17 : <b>6.71</b>	5.73 : <b>5.78</b>	6.60 : 5.34	6.60 : 5.34	5.84 : <b>5.51</b>	5.84 : <b>5.51</b>	5.46 : 5.51	5.46 : <b>5.51</b>
Commercial	Average Climate		6.29 : <b>5.97</b>	6.05 : <b>5.26</b>	7.05 : <b>5.11</b>	7.05 : <b>5.11</b>	6.29 : <b>5.11</b>	6.29 : <b>5.11</b>	6.19 : <b>5.03</b>	6.19 : <b>5.03</b>
	Cold Climate		6.75 : <b>5.06</b>	6.79 : <b>4.6</b> 1	7.94 : <b>4.78</b>	7.94 : <b>4.78</b>	6.95 : <b>4.53</b>	6.95 : <b>4.53</b>	6.89 : 4.40	6.89 : <b>4.40</b>
ndoor Unit										
ower source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V   240V	230V   240V	230V   240V	230V   240V	230V   240V	230V   240V	230V   240V	230V   240V
Dimensions $H \times W \times D$	Indoor	mm	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
let weight	Indoor / Panel	kg	20/5	20 / 5	25 / 5	25 / 5	25 / 5	25 / 5	25 / 5	25/5
ir volume (H/M/L)	Cooling : Heating	L/s	350 / 267 / 217 : 350 / 267 / 21	7 367 / 267 / 217 : 367 / 267 / 217	601 / 434 / 300 : 601 / 434 / 300	601 / 434 / 300 : 601 / 434 / 30		7 617 / 450 / 317 : 617 / 450 / 317		
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	36 / 31 / 28 : 36 / 31 / 28	37 / 31 / 28 : 37 / 31 / 28	45 / 38 / 32 : 45 / 38 / 32	45 / 38 / 32 : 45 / 38 / 32	46 / 39 / 33 : 46 / 39 / 33	46 / 39 / 33 : 46 / 39 / 33	47 / 40 / 34 : 47 / 40 / 34	47 / 40 / 34 : 47 / 40 / 3
Sound power level (H/M/L)	Cooling : Heating	dB	51 / 46 / 43 : 51 / 46 / 43	52 / 46 / 43 : 52 / 46 / 43	60 / 53 / 47 : 60 / 53 / 47	60 / 53 / 47 : 60 / 53 / 47	61 / 54 / 48 : 61 / 54 / 48	61 / 54 / 48 : 61 / 54 / 48	62 / 55 / 49 : 62 / 55 / 49	62 / 55 / 49 : 62 / 55 / 4
lumber of fan speeds			5	5	5	5	5	5	5	5
Drain pipe size Dutdoor Unit		mm	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
'ower source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
		V	230V   240V	230V   240V	230V   240V	400V   415V	230V   240V	400V   415V	230V   240V	400V   415V
Current (rated)	Cooling : Heating	A	7.20 : 5.95   6.90 : 5.70	9.65 : 7.45   9.25 : 7.15	12.5 : 9.70   12.0 : 9.30	4.15 : 3.20   4.00 : 3.10	16.1 : 13.0   15.4 : 12.5	5.35 : 4.35   5.15 : 4.15	20.0 : 15.5   19.2 : 14.8	6.65 : 5.15   6.40 : 4.95
imensions H × W × D		mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
let weight		kg	43	50	83	83	87	87	87	87
ir volume	Cooling : Heating	m³/min	701 : <b>701</b>	746 : <b>766</b>	1,219 : <b>1,219</b>	1,219 : <b>1,219</b>	1,369 : 1,336	1,369 : <b>1,336</b>	1,402 : 1,369	1,402 : <b>1,369</b>
ound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : <b>52 (50)</b>	52 (50) : <b>52 (50)</b>	55 (53) : 55 (53)	55 (53) : <b>55 (53)</b>	56 (54) : 56 (54)	56 (54) : 56 (54)
ound power level (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	67 (65) : 67 (65)	70 (68) : 70 (68)	70 (68) : <b>70 (68)</b>	73 (71) : 73 (71)	73 (71) : <b>73 (71</b> )	74 (72) : 74 (72)	74 (72) : 74 (72)
iping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7*1	Ø6.35 / Ø15.88*2	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min max.	m	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
levation difference (OU located lower	, OU located higher)	m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
laximum chargeless length		m	30	30	30	30	30	30	30	30
Refrigerant at shipping, Additional gas		g	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
Operation ranges	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

### 4-WAY Cassette

- Notes: In the case of nance X OFF In case it is necessary to indicate the air flow volume in (I/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point

- multiplied by 16.7 and rounded down the decimal point.
  AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
  TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
  Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
  H:High at setting 5 stage (Level 5), M:Middle at setting 5 stage (Level 3), L:Low at setting 5 stage (Level 1), M:Middle at setting 5 stage (Level 3), L:Low at setting 5 stage (Level 1), M:Middle at 1)
- (Level 1) \*<sup>1</sup> For pipinng connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit. \*<sup>2</sup> For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

46

# **Indoor Unit** 4-WAY Mini Cassette

Designed to fit perfectly into a 60 x 60 cm ceiling grid without the need to alter the bar configuration, 4-WAY Mini Cassette is ideal for small commercial and retrofit applications.




### **Technical focus**

- Market Leading Energy Efficiency
- Compact Design (260mm high)
- Easy Installation
- Built-in Drain Pump
- Mini Cassette fits into a 60 x 60cm ceiling grid
- Powerful drain pump gives 750mm lif
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption
- Fresh air knock out
- Multi-directional airflow


### Compact designt

The panel is a compact (70×70 cm) so it can be installed even in a small room where space is limited.




### Lighter and slimmer, easier installation

When only 260mm of indoor body height, it can easily fit in limited spaces and tight spots. (Required 288mm from bottom of panel to top of the unit)



### A drain height of up to 750 mm from the ceiling surface

The internal pump allows the drain pipe to be elevated up to 750mm above the base of the unit.



### Specifications

Capacity			2.5KW	3.6KW	5.0KW	6.0KW	
model Name	Indoor Unit		CS-Z25UB4RAW	CS-Z35UB4RAW	CS-Z50UB4RAW	CS-Z60UB4RAW	
model Name	Outdoor Unit		CU-Z25UBRA	CU-Z35UBRA	CU-Z50UBRA	CU-Z60UBRA	
Cooling capacity :		kW	2.50 (0.85 - 3.20) 3.20 (0.85 - 4.80)	3.50 (0.85 - 4.00) 4.00 (0.85 - 5.40)	4.80 (0.90 - 5.70) 5.00 (0.90 - 7.10)	5.70 (0.90 - 6.35) 6.00 (0.90 - 8.00)	
Heating capacity		BTU/h	8,530 (2,900 - 10,900) 10,900 (2,900 - 16,400)	11,900 (2,900 - 13,600) 13,600 (2,900 - 18,400)	16,400 (3,070 - 19,400) 17,100 (3,070 - 24,200)	19,400 (3,070 - 21,700) 20,500 (3,070 - 27,300)	
EER : COP		W/W	4.55 : <b>4.16</b>	3.89 : <b>3.9</b> 2	3.38 : <b>3.3</b> 8	3.29 : <b>3.30</b>	
Power input (min - max)	Cooling : Heating	kW	0.55 (0.24 - 0.82) : 0.77 (0.23 - 1.32)	0.90 (0.24 - 1.18) : 1.02 (0.23 - 1.65)	1.42 (0.26 - 1.84) : 1.48 (0.26 - 2.41)	1.73 (0.26 - 2.20) : 1.82 (0.26 - 2.75	
Indoor Unit							
Deview elevine		Phase/Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	
Power source		V	230V   240V	230V   240V	230V   240V	230V   240V	
Dimensions	$H\timesW\timesD$	mm	260 x 575 x 575	260 x 575 x 575	260 x 575 x 575	260 x 575 x 575	
Net weight		kg	18	18	18	18	
Air volume	Cooling : Heating	L/s	175 : <b>180</b>	175 : <b>195</b>	192 : <b>197</b>	237 : <b>253</b>	
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	34 / 25 / 22 : 35 / 28 / 25	34 / 26 / 23 : 37 / 28 / 25	38 / 28 / 25 : 39 / 29 / 26	43 / 32 / 29 : 45 / 32 / 29	
Sound power level (H/M/L)	Cooling : Heating	dB(A)	50 / 41 / 38 : 51 / 44 / 41	50 / 42 / 39 : 53 / 44 / 41	54 / 44 / 41 : 55 / 45 / 42	59 / 48 / 45 : 61 / 48 / 45	
Outdoor Unit							
D		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
Power source		V	230V   240V	230V   240V	230V   240V	230V   240V	
Current (rated)	Cooling : Heating	А	2.60 : 3.50   2.50 : 3.40	4.05 : 4.55   3.95 : 4.35	6.30 : 6.50   6.10 : 6.30	7.60 : 8.00   7.40 : 7.80	
Dimensions	$H \times W \times D$	mm	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	
Net weight		kg	33	35	42	43	
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.70	Ø6.35 / Ø12.70	
Pipe length	min max.	m	3 - 20	3 - 20	3 - 30	3 - 30	
Elevation difference		m	15	15	20	20	
Operation ranges	Cooling : Heating	°C	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	

The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823
Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB

CS-Z25UB4RAW

CS-Z35UB4RAW

CS-Z50UB4RAW

CS-Z60UB4RAW

. Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

• 4-WAY Mini Cassette is not supported by PAC Smart Connectivity+

\*1 If you connect WLAN adaptor (CZ-TACG1) to an indoor unit other than wall mounted type and operate from the smartphone with Panasonic Comfort Cloud App, airflow direction may not be operated as it is shown on the display.

### 4-WAY Mini Cassette



# **Indoor Unit** Under Ceiling

Providing outstanding energy-saving performance, comfort and long-distance airflow distribution, these units are perfect for retail stores and schools.



C.nanoe X nanoe™ X as a standard\* noe X Generator Mark 2





S-6071PT3E

The shape of the outlet has been optimised to provide long-distance air flow distribution. Even in long rooms, air flow reaches every corner for exceptionally comfortable air conditioning.



S-1014PT3E

### Compact Looking, Stylish, One-Motion Design

With its streamlined, one-motion form, the unit looks thin and compact when installed for a neat appearance in any room. When not operating, the louver closes to provide an elegant look while also keeping the unit clean.



### **Energy-Saving Technology** Delivering Top-Class Efficiency


Top Class Energy Saving


Optimisation of the shape of the casing and fan assures bigger air flow and higher efficiency. Energy-saving performance is top class in the industry.

### New DC fan motor



### Large Diagonal Air Flow Fan



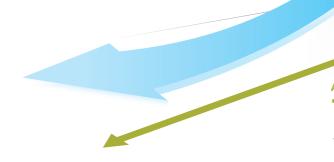

	Air flow distance					
High Ceiling Setting*2	100	125	140			
4.3m	Up to 12m	Up to 13m	Up to 13m			

\*2 Dedicated fan speed setting required.

### Under Ceiling














CZ-RTC6BL CZ-RTC6BLW Note: Product image not to scale

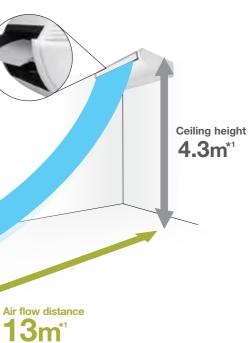

\*1 Results are based on specific testing conditions.




## Indoor Unit: Under Ceiling

## Specifications of R32 Deluxe Model

Capacity			-	6.8kW	9.5kW		12.1kW		13.4kW	
		Indoor Unit		S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E
Model Name		Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8
			kW	6.8 (2.2 - 9.0)	9.5 (3.1 - 12.5)	9.5 (3.1 - 12.5)	12.1 (3.2 - 14.0)	12.1 (3.2 - 14.0)	13.4 (3.3 - 16.0)	13.4 (3.3 - 16.0)
Cooling capacity :			KVV	8.0 (2.0 - 9.0)	11.2 (3.1 - 14.0)	11.2 (3.1 - 14.0)	14.0 (3.2 - 16.0)	14.0 (3.2 - 16.0)	16.0 (3.3 - 18.0)	16.0 (3.3 - 18.0)
Heating capacity			BTU/h	23,200 (7,500 - 30,700)	32,400 (10,600 - 42,700)	32,400 (10,600 - 42,700)	41,300 (10,900 - 47,800)	41,300 (10,900 - 47,800)	45,700 (11,300 - 54,600)	45,700 (11,300 - 54,600)
			BTU/N	27,300 (6,800 - 30,700)	38,200 (10,600 - 47,800)	38,200 (10,600 - 47,800)	47,800 (10,900 - 54,600)	47,800 (10,900 - 54,600)	54,600 (11,300 - 61,400)	54,600 (11,300 - 61,400)
EER : COP			W/W	3.91 : <mark>3.96</mark>	4.15 : <b>4.09</b>	4.15 : 4.09	3.51 : 3.78	3.51 : 3.78	3.21 : <b>3.48</b>	3.21 : <b>3.48</b>
COP@H2 condition			W/W	2.60	2.72	2.72	2.52	2.52	2.37	2.37
Total power input		Cooling : Heating	kW	1.74 : 2.02	2.29 : <b>2.74</b>	2.29 : 2.74	3.45 : <b>3.70</b>	3.45 : <b>3.70</b>	4.17 : 4.60	4.17 : <b>4.60</b>
		Hot Climate		5.96 : <mark>5.61</mark>	6.07 : <b>5.59</b>	6.07 : <b>5.59</b>	5.42 : <b>5.3</b> 7	5.42 : <b>5.37</b>	5.07 : <b>5.26</b>	5.07 : <b>5.26</b>
	Residential	Average Climate		5.13 : 4.63	5.25 : 4.74	5.25 : 4.74	4.85 : 4.44	4.85 : 4.44	4.61 : 4.22	4.61 : 4.22
		Cold Climate		5.24 : 4.00	5.33 : 4.21	5.33 : 4.21	5.03 : 3.84	5.03 : 3.84	4.82 : 3.58	4.82 : 3.58
TCSPF : HSPF		Hot Climate		6.74 : 5.74	6.84 : 5.66	6.84 : 5.66	6.07 : 5.50	6.07 : 5.50	5.66 : 5.45	5.66 : 5.45
	Commercial	Average Climate		6.92 : 5.18	6.95 : 5.18	6.95 : 5.18	6.41 : <b>4.97</b>	6.41 : <b>4.97</b>	6.10 : 4.83	6.10 : 4.83
		Cold Climate		7.55 : <b>4.53</b>	7.54 : 4.66	7.54 : 4.66	7.03 : 4.35	7.03 : 4.35	6.71 : <b>4.13</b>	6.71 : <b>4.13</b>
Indoor Unit									1	1
D			Phase/Hz	1 Phase / 50Hz						
Power source			V	230V 240V						
Dimension	HxWxD	Indoor	mm	235 X 1,275 X 690	235 X 1,590 X 690					
Net weight		Indoor	kg	34	40	40	40	40	40	40
Air volume (H/M/L)		Cooling : Heating	L/s	350 / 300 / 258 : 350 / 300 / 258	501 / 417 / 384 : 501 / 417 / 384	501 / 417 / 384 : 501 / 417 / 384	567 / 467 / 400 : 567 / 467 / 400	567 / 467 / 400 : 567 / 467 / 400	584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 584 / 484 / 417
Sound pressure level	(H/M/L)	Cooling : Heating	dB(A)	39 / 35 / 30 : 39 / 35 / 30	42 / 37 / 34 : 42 / 37 / 34	42 / 37 / 34 : 42 / 37 / 34	46 / 40 / 35 : 46 / 40 / 35	46 / 40 / 35 : 46 / 40 / 35	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36
Sound power level (H	I/M/L)	Cooling : Heating	dB	57 / 53 / 48 : 57 / 53 / 48	60 / 55 / 52 : 60 / 55 / 52	60 / 55 / 52 : 60 / 55 / 52	64 / 58 / 53 : 64 / 58 / 53	64 / 58 / 53 : 64 / 58 / 53	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54
Number of fan speed	ls			5	5	5	5	5	5	5
Drain piping			mm	VP-20						
Outdoor Unit										
D			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
Power source			V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)		Cooling : Heating	A	8.20 : 9.45 7.90 : 9.05	10.8 : 12.9 10.4 : 12.4	3.65 : 4.35 3.45 : 4.15	16.1 : 17.3 15.5 : 16.6	5.40 : 5.85 5.20 : 5.65	19.5 : 21.5 18.7 : 20.6	6.55 : 7.30 6.30 : 6.95
Dimension		H × W × D	mm	996 x 940 x 340	1,416 x 940 x 340	1,416 × 940 × 340	1,416 x 940 x 340	1,416 × 940 × 340	1,416 x 940 x 340	1,416 × 940 × 340
Net weight			kg	66	99	99	99	99	99	99
Air volume		Cooling : Heating	L/s	1,018 : 1,002	1,970 : 1,803	1,970 : 1,803	2,087 : 1,870	2,087 : 1,870	2,154 : 1,937	2,154 : 1,937
Sound pressure level	(Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)
Sound power level (S	silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)	69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)
Piping connections		Liquid / Gas	mm	Ø9.52 / Ø15.88						
Pipe length range		min max.	m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85	5 - 85
	OU located low	er, OU located higher)	m	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeless			m	30	30	30	30	30	30	30
Refrigerant at shippin	0	as amount	g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)					
Operating range		Cooling : Heating	°C	-15 to 48 : -20 to 24						

## Specifications of R32 Compact Model

Capacity				6.0kW	6.8kW	10.0kW		12.5kW		13.6kW	
		Indoor Unit		S-6071PT3E	S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E
Model Name		Outdoor Unit		U-60PZ3R5	U-71PZ3R5	U-100PZ3R5	U-100PZ3R8	U-125PZ3R5	U-125PZ3R8	U-140PZ3R5	U-140PZ3R8
			100/	6.0 (2.0 - 7.1)	6.8 (2.6 - 7.7)	10.0 (3.0 - 11.5)	10.0 (3.0 - 11.5)	12.5 (3.2 - 13.5)	12.5 (3.2 - 13.5)	13.6 (3.3 - 15.0)	13.6 (3.3 - 15.0
Cooling capacity :			kW	6.0 (1.8 - 7.0)	6.8 (2.1 - 8.1)	10.0 (3.0 - 14.0)	10.0 (3.0 - 14.0)	12.5 (3.3 - 15.0)	12.5 (3.3 - 15.0)	14.0 (3.4 - 16.0)	14.0 (3.4 - 16.0
Heating capacity			BTU/h	20,500 (6,800 - 24,200)	23,200 (8,900 - 26,300)	34,100 (10,200 - 39,200)	34,100 (10,200 - 39,200)	42,700 (10,900 - 46,100)	42,700 (10,900 - 46,100)	46,400 (11,300 - 51,200)	46,400 (11,300
			BIU/n	20,500 (6,100 - 23,900)	23,200 (7,200 - 27,600)	34,100 (10,200 - 47,800)	34,100 (10,200 - 47,800)	42,700 (11,300 - 51,200)	42,700 (11,300 - 51,200)	47,800 (11,600 - 54,600)	47,800 (11,600
EER : COP			W/W	3.82 : 4.41	3.33 : 4.22	3.64 : 4.24	3.64 : 4.24	3.32 : 3.89	3.32 : <b>3.89</b>	3.15 : <b>3.70</b>	3.15 : 3.70
COP@H2 condition			W/W	3.19	3.24	2.70	2.70	2.57	2.57	2.53	2.53
Total power input		Cooling : Heating	kW	1.57 : 1.36	2.04 : 1.61	2.75 : 2.36	2.75 : 2.36	3.76 : 3.21	3.76 : 3.21	4.32 : 3.78	4.32 : 3.78
		Hot Climate		5.18 : 5.97	5.02 : 5.60	5.24 : 5.58	5.24 : 5.58	4.98 : 5.36	4.98 : 5.36	4.81 : 5.25	4.81 : 5.25
	Residential	Average Climate		4.54 : 4.88	4.45 : 4.76	4.63 : 4.78	4.63 : 4.78	4.44 : 4.45	4.44 : 4.45	4.33 : 4.25	4.33 : 4.25
TOODE LIDDE		Cold Climate		4.61 : 4.12	4.60 : 4.09	4.70 : 4.15	4.70 : 4.15	4.57 : 3.76	4.57 : 3.76	4.48 : 3.55	4.48 : 3.55
TCSPF : HSPF		Hot Climate		5.63 : 6.03	5.57 : <b>5.63</b>	5.84 : 5.60	5.84 : 5.60	5.52 : <b>5.44</b>	5.52 : 5.44	5.35 : 5.39	5.35 : 5.39
	Commercial	Average Climate		5.63 : 5.40	5.69 : 5.14	6.12 : 5.14	6.12 : 5.14	5.76 : 4.91	5.76 : 4.91	5.67 : 4.80	5.67 : 4.80
		Cold Climate		5.98 : 4.66	6.18 : 4.53	6.63 : 4.57	6.63 : 4.57	6.25 : <b>4.25</b>	6.25 : 4.25	6.20 : 4.09	6.20 : <b>4.09</b>
Indoor Unit									1		
5			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz						
Power source			V	230V 240V	230V 240V						
Dimension	HxWxD	Indoor	mm	235 X 1,275 X 690	235 X 1,275 X 690	235 X 1,590 X					
Net weight		Indoor	kg	34	34	40	40	40	40	40	40
Air volume (H/M/L)		Cooling : Heating	L/s	334 / 283 / 242 : 334 / 283 / 242	350 / 300 / 258 : 350 / 300 / 258	501 / 417 / 384 : 501 / 417 / 384	501 / 417 / 384 : 501 / 417 / 384	567 / 467 / 400 : 567 / 467 / 400	567 / 467 / 400 : 567 / 467 / 400	584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 5
Sound pressure level	el (H/M/L)	Cooling : Heating	dB(A)	38 / 34 / 29 : 38 / 34 / 29	39 / 35 / 30 : 39 / 35 / 30	42 / 37 / 34 : 42 / 37 / 34	42 / 37 / 34 : 42 / 37 / 34	46 / 40 / 35 : 46 / 40 / 35	46 / 40 / 35 : 46 / 40 / 35	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 4
Sound power level (H	H/M/L)	Cooling : Heating	dB	56 / 52 / 47 : 56 / 52 / 47	57 / 53 / 48 : 57 / 53 / 48	60 / 55 / 52 : 60 / 55 / 52	60 / 55 / 52 : 60 / 55 / 52	64 / 58 / 53 : 64 / 58 / 53	64 / 58 / 53 : 64 / 58 / 53	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 6
Number of fan speed	ds			5	5	5	5	5	5	5	5
Drain piping			mm	VP-20	VP-20						
Outdoor Unit									·	1	
			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
Power source			V	230V 240V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)		Cooling : Heating	A	7.20:6.05 6.90:5.80	9.45 : 7.15 9.05 : 6.85	13.1 : 11.3 12.6 : 10.8	4.35 : 3.75 4.20 : 3.60	17.4 : 14.8 16.7 : 14.2	5.75 : 4.95 5.55 : 4.75	20.0 : 17.5 19.1 : 16.8	6.65 : 5.80 6.4
Dimension		H × W × D	mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 37				
Net weight			kg	43	50	83	83	87	87	87	87
Air volume		Cooling : Heating	L/s	701 : 701	746 : 766	1,219 : 1,219	1,219 : 1,219	1,369 : 1,336	1,369 : 1,336	1,402 : 1,369	1,402 : 1,369
Sound pressure level	el (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : 52 (50)	52 (50) : 52 (50)	55 (53) : 55 (53)	55 (53) : 55 (53)	56 (54) : 56 (54)	56 (54) : 56 (54
Sound power level (S	Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	67 (65) : 67 (65)	70 (68) : 70 (68)	70 (68) : 70 (68)	73 (71) : 73 (71)	73 (71) : 73 (71)	74 (72) : 74 (72)	74 (72) : 74 (72
Piping connections		Liquid / Gas	mm	Ø6.35 / Ø12.7*1	Ø6.35 / Ø15.88*2	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88				
Pipe length range		min max.	m	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50	5 - 50
	(OU located low	er, OU located higher)		15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30	15, 30
Maximum chargeless	·		m	30	30	30	30	30	30	30	30
Refrigerant at shippir	0	gas amount	q	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45			
		Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15						



- Notes:
  In the case of nanoe X OFF
  In case it is necessary to indicate the air flow volume in (I/s), the value in (m<sup>3</sup>/min.) shall be multiplied by 16.7 and rounded down the decimal point.
  AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
  TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
  \*' For piping connection for 6.0kW unit, connect the gas socket tube (0412.7-015.88) to the gas tubing side indoor unit and connect the liquid socket tube (06.35-09.52) to the liquid tubing side indoor unit.
  \*2 For piping connection for 7.1kW unit, connect the liquid socket tube (06.35-09.52) to the liquid tubing side indoor unit.

# Wall Mounted

Providing small, lightweight and low noise level design, it is ideal for small offices and other commercial applications. It also has a stylish smooth design with a washable front panel.





nanoe™ X as a standard\* nanoe X Generator Mark 2





### **Technical focus**

- Closed discharge port when not in use
- Lighter and smaller units make installation easy
- Quiet operation
- Smooth and durable design

### Closed discharge port

When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

### Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear, left bottom, making installation easier.

### • Piping outlet in six directions

- Washable front panel
- Air distribution is automatically altered depending on the operational mode of the unit

### Quiet operation

Low operating noise level makes these units ideal for hotels and hospital applications.


### Washable front panel

The indoor unit's front panel can be easily cleaned for trouble-free maintenance.



Air distribution is automatically adjusted depending on the operational mode of the unit

Air outlet angle is automatically adjusted for cooling and heating operation.



## Specifications R32

Capacity				9.5kW		9.0kW	
		Indoor Unit		S-100PK3R	S-100PK3R	S-100PK3R	S-100PK3R
Model Name		Outdoor Unit		U-100PZH3R5	U-100PZH3R8	U-100PZ3R5	U-100PZ3R8
Cooling capacity	:		kW	9.5 (3.1 - 10.5) 9.5 (3.1 - 11.5)	9.5 (3.1 - 10.5) 9.5 (3.1 - 11.5)	9.0 (3.0 - 9.7) 9.0 (3.0 - 10.5)	9.0 (3.0 - 9.7) 9.0 (3.0 - 10.5)
Heating capacity			BTU/h	32,400 (10,600 - 35,800) 32,400 (10,600 - 39,200)	32,400 (10,600 - 35,800) 32,400 (10,600 - 39,200)	30,700 (10,200 - 33,100) 30,700 (10,200 - 35,800)	30,700 (10,200 - 33,10 30,700 (10,200 - 35,80
EER : COP			W/W	3.26 : <b>3.97</b>	3.26 : <b>3.97</b>	3.47 : <b>3.93</b>	3.47 : 3.93
COP@H2 conditi	on		W/W	2.50	2.50	2.53	2.53
Total power input		Cooling : Heating	kW	2.91 : <b>2.39</b>	2.91 : <b>2.39</b>	2.59 : <mark>2.29</mark>	2.59 : <mark>2.29</mark>
		Hot Climate		5.07 : <b>5.70</b>	5.07 : <b>5.70</b>	4.85 : <b>5.29</b>	4.85 : <b>5.29</b>
	Residential	Average Climate		4.52 : <b>4.74</b>	4.52 : <b>4.74</b>	4.21 : 4.55	4.21 : <b>4.55</b>
		Cold Climate		4.72 : <b>4.10</b>	4.72 : <b>4.10</b>	4.27 : <b>3.99</b>	4.27 : 3.99
TCSPF : HSPF		Hot Climate		5.68 : <b>5.77</b>	5.68 : <b>5.77</b>	5.39 : <b>5.31</b>	5.39 : <mark>5.31</mark>
	Commercial	Average Climate		5.85 : <mark>5.20</mark>	5.85 : <mark>5.20</mark>	5.42 : 4.87	5.42 : <b>4.87</b>
		Cold Climate		6.42 : <b>4.59</b>	6.42 : <b>4.59</b>	5.82 : 4.37	5.82 : <b>4.37</b>
Indoor Unit							
			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase/ 50Hz
Power source			V	230V   240V	230V   240V	230V   240V	230V   240V
Dimensions	H × W × D	Indoor	mm	302 x 1,120 x 236	302 x 1,120 x 236	302 x 1,120 x 236	302 x 1,120 x 236
Net weight			kg	14	14	14	14
Air volume (H/M/	L)	Cooling : Heating	L/s	367 / 308 / 250 367 / 308 / 250	367 / 308 / 250 367 / 308 / 250	367 / 308 / 250 367 / 308 / 250	367 / 308 / 250 367 / 308 / 250
Sound pressure l	evel (H/M/L)	Cooling : Heating	dB(A)	49 / 45 / 41 : 49 / 45 / 41	49 / 45 / 41 : 49 / 45 / 41	49 / 45 / 41 : 49 / 45 / 41	49 / 45 / 41 : 49 / 45
Sound power lev	( )	Cooling : Heating	dB	65 / 61 / 57 : 65 / 61 / 57	65 / 61 / 57 : 65 / 61 / 57	65 / 61 / 57 : 65 / 61 / 57	65 / 61 / 57 : 65 / 61
Number of fan sp	· /			5	5	5	5
Drain pipe size			mm	VP-16	VP-16	VP-16	VP-16
Outdoor Unit	_		11011	10	11 10	110	110
outdoor onit			Phase/Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
Power source			V	230V   240V	400V   415V	230V   240V	400V   415V
Current (rated)		Cooling : Heating	A	13.8 : 11.3   13.2 : 10.8	4.60 : 3.80   4.40 : 3.60	12.4 : 10.9   11.9 : 10.5	4.10 : 3.65   3.95 : 3
Dimensions		H × W × D	mm	1,416 x 940 x 340	1,416 x 940 x 340	996 x 980 x 370	996 x 980 x 370
Net weight			ka	99	99	83	83
Air volume		Cooling : Heating	m³/min	1.970 : <b>1.803</b>	1.970 : 1.803	1.219 : 1.219	1,219 : 1,219
Sound pressure ( (Silent mode)	evel	Cooling : Heating	dB(A)	52 (50) : 52 (50)	52 (50) : 52 (50)	52 (50) : 52 (50)	52 (50) : 52 (50)
Sound power lev (Silent mode)	el	Cooling : Heating	dB	68 (66) : <mark>68 (66)</mark>	68 (66) : <mark>68 (66)</mark>	70 (68) : <b>70 (68)</b>	70 (68) : <b>70 (68)</b>
Piping connection	ns	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range		min max.	m	5 - 85	5 - 85	5 - 50	5 - 50
Elevation different (OU located lower	се		m	15, 30	15, 30	15, 30	15, 30
Maximum charge			m	30	30	30	30
Refrigerant at shi		nal gas amount	g	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 2,400 / 45 (g/m)	R32 2,400 / 45 (g/m
		Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

In the case of nance X OFF

In case it is necessary to indicate the air flow volume in (l/s), the value in (m<sup>3</sup>/min.) shall be multiplied by 16.7 and rounded down the decimal point.
 AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.

TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
H:High at setting 5 stage (Level 5), M:Middle at setting 5 stage (Level 3), L:Low at setting 5 stage (Level 1)

### Wall Mounted







CZ-RTC6BL CZ-RTC6BLW Note: Product image not to scale.










CZ-CAPWFC1 CZ-CENSC1

# Floor Console

This floor-type console's slender profile integrates unobtrusively into any interior, in a position that's also ideal when you want to warm your feet when it's cold.



### C.nanoe X nanoe™ X as a standard\* \*nanoe X Generator Mark 1



### **Technical focus**

- A breakthrough design that integrates perfectly with the most modern environments.
- Compact design fits 50mm wall recess

### Upper & Lower Vane Blow

Optimum air flow from the top and bottom of the unit assures that even your feet are kept comfortably warm. (Only during heating)



cools the entire room.

Upward and downward air flow warms the whole room uniformly.

Heating

### **Compact Design**

The design features a flat, elegant front panel that provides a neat appearance and the unit can be recessed into a wall up to 50 mm.



### Super Quiet

The indoor and outdoor units deliver quiet operation and pressing the Quiet mode button lowers operation noise even further to just 19dB for indoor unit with low fan speed.



\*1 CS-Z25UFRAW & CS-Z35UFRAW: In the Quiet mode during heating operation with low fan speed.

### Specifications of Current Model

Capacity				2.5kW	3.5kW	5.0kW	
		Indoor Unit		CS-Z25UFRAW	CS-Z35UFRAW	CS-Z50UFRAW	
Model Name		Outdoor Unit		CU-Z25UBRA	CU-Z35UBRA	CU-Z50UBRA	
Cooling capacity :			kW	2.50 (0.85~3.40) 3.40 (0.85~5.00)	3.50 (0.85~3.80) 4.30 (0.85~6.00)	5.00 (0.90~5.70) 5.60 (0.90~8.10)	
Heating capacity			BTU/h	8,530 (2,900~11,600) 11,600 (2,900~17,100)	11,900 (2,900~13,000) 14,700 (2,900~20,500)	17,100 (3,070~19,400) 19,100 (3,070~27,600)	
EER : COP			W/W	5.00 : <b>4.59</b>	4.07 : <b>4.06</b>	3.65 : 3.81	
Power input (min-ma	ax)	Cooling : Heating	kW	0.50 (0.24-0.90) 0.74 (0.24-1.35)	0.86 (0.24-1.02) 1.06 (0.24-1.75)	1.37(0.26-1.81) : 1.47 (0.26-2.60)	
		Hot Climate		5.70 : 4.12	5.46 : <b>4.49</b>	5.51 : <b>4.48</b>	
	Residential	Average Climate		5.05 : <b>4.21</b>	5.01 : 4.29	5.20 : <b>4.18</b>	
		Cold Climate		4.97 : <b>3.94</b>	5.07 : 3.78	5.37 : <b>3.69</b>	
TCSPF : HSPF		Hot Climate		6.22 : <b>3.89</b>	6.01 : <b>4.18</b>	6.16 : 4.20	
	Commercial	Average Climate		6.40 : <b>3.8</b> 5	6.60 : <b>4.00</b>	7.34 : 3.99	
		Cold Climate		6.97 : <b>3.78</b>	7.31 : <b>3.80</b>	8.46 : <b>3.76</b>	
Indoor Unit							
Power source			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
Power source			V	230V   240V	230V   240V	230V   240V	
Dimensions		$H\timesW\timesD$	mm	600 x 750 x 207	600 x 750 x 207	600 x 750 x 207	
Net weight			kg	13	13	13	
Air volume		Cooling : Heating	L/s	163 : <b>173</b>	170 : 182	198 : <mark>227</mark>	
Sound pressure leve	el (H/M/L)	Cooling : Heating	dB(A)	38 / 25 / 20 : <b>38 / 25 / 19</b>	39 / 26 / 20 : 39 / 25 / 19	44 / 31 / 27 : 46 / 33 / 29	
Sound power level (	H/M/L)	Cooling : Heating	dB(A)	54 / 41 / 36 : 54 / 41 / 35	55 / 42 / 36 : 55 / 41 / 35	60 / 47 / 43 : 62 / 49 / 45	
Outdoor Unit							
Power source			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
Fower source			V	230V   240V	230V   240V	230V   240V	
Current (rated)		Cooling : Heating	А	2.40 : 3.40   2.30 : 3.25	3.90 : 4.80   3.70 : 4.60	6.20 : 6.60   6.00 : 6.40	
Dimensions		H x W x D	mm	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	
Net weight			kg	33	35	42	
Piping connections		Liquid / Gas	m	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	
Pipe length		min max.	m	3 - 20	3 - 20	3 - 30	
Elevation difference			m	15	15	20	
Piping connections		Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	

**R32** 

Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
 Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB
 Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.

· Floor console is not supported by PAC Smart Connectivity+.

\*1 If you connect WLAN adaptor (CZ-TACG1) to an indoor unit other than wall mounted type and operate from the smartphone with Panasonic Comfort Cloud App, airflow direction may not be operated as it is shown on the display





controller included


Note: Product image not to scale.


## **Indoor Unit Dimensions**

### **HIGH STATIC PRESSURE DUCTED**

### Dimensions (6.0kW – 16.0kW)

S-60PE3R / S-71PE3R / S-100PE3R / S-125PE3R / S-140PE3R / S-160PE3R







1 Refrigerant liquid tubing (Flare) ø9.52

2 Refrigerant gas tubing (Flare) ø15.88 (a) Air intake High Static Pressure duct connecting side flange
 (b) Air discharge High Static Pressure duct connecting side flange

(5) Drain port




• The PZ3 series type 60 and 71 outdoor unit refrigerant pipe is different dimention from indoor unit. Refer to technical data for more details.



unit: mm

## **HIGH STATIC PRESSURE SPLITTABLE DUCTED**

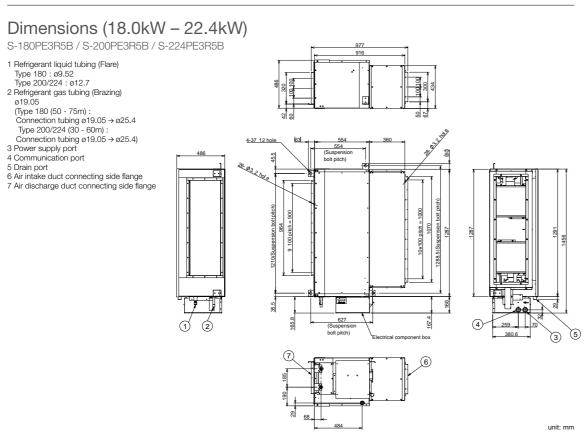

### **HIGH STATIC PRESSURE ADAPTIVE DUCTED**

Dimensions (3.6kW – 14.0kW) S-3650PF3E / S-6071PF3E / S-1014PF3E


### Detailed dimensions of indoor unit

Туре	A	В	C	D	E	F
3650	867	800	450 (Pitch 150 × 3)	71	592	12
6071	1,067	1,000	750 (Pitch 150 × 5)	21	792	16
1014	1,467	1,400	1,050 (Pitch 150 × 7)	71	1,192	20

- a) Refrigerant tubing joint (liquid tube)b) Refrigerant tubing joint (gas tube)
- c) Upper drain port VP20 (ø26 mm)
- 200 mm flexible hose supplied
- d) Bottom drain port VP20 (ø26 mm)
- e) Suspension lug  $(4 12 \times 30 \text{ mm})$
- f) Power supply outlet
  g) Fresh air intake port (ø100 mm)
- h) Flange for flexible air outlet duct
   i) Electrical component box



8-ø3.2 hole

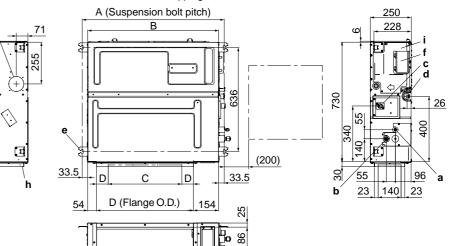



56



For M4 self-tapping screw


unit: mm


## **Indoor Unit Dimensions**

## **ULTRA SLIM DUCTED**

Dimensions (2.6kW – 5.6kW)


CS-Z25UD3RAW / CS-Z35UD3RAW / CS-Z50UD3RAW / CS-Z60UD3RAW

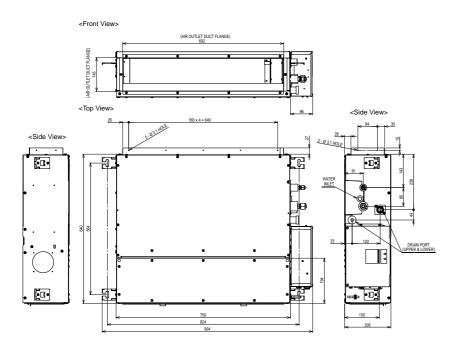

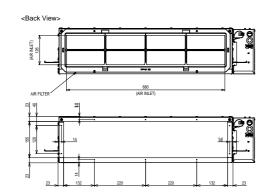

unit: mm


### **4-WAY CASSETTE**

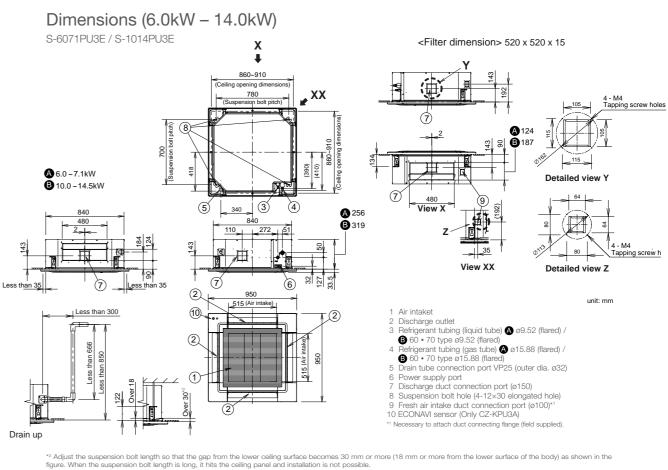


### **4-WAY MINI CASSETTE**

### Dimensions (2.5kW – 5.7kW)

CS-Z25UB4RAW / CS-Z35UB4RAW / CS-Z50UB4RAW / CS-Z60UB4RAW

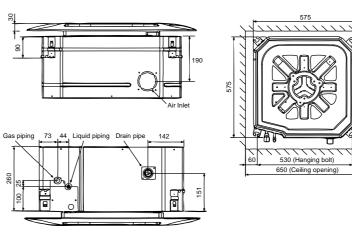







## **Indoor Unit Dimensions**


### **UNDER CEILING**

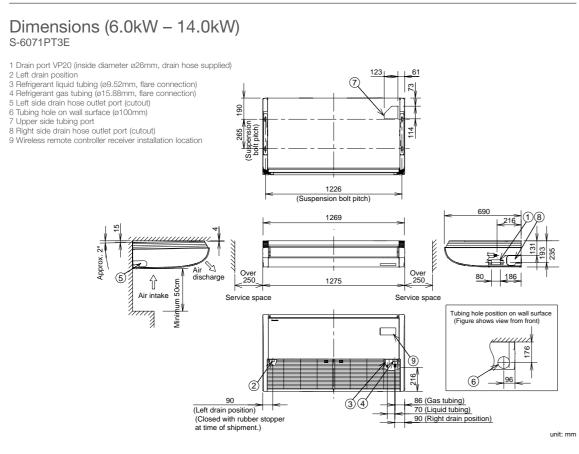

S-1014PT3E

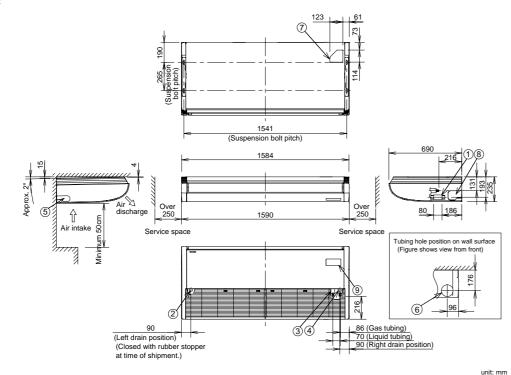

### WALL MOUNTED

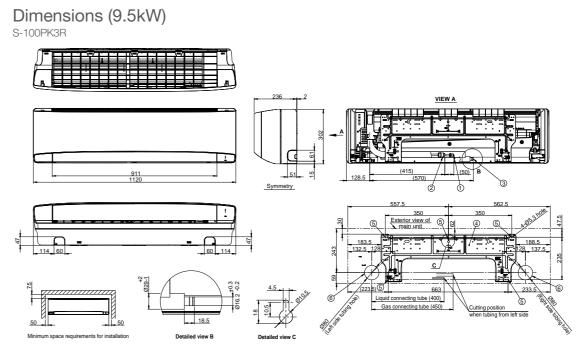



### **FLOOR CONSOLE**


<Side View>

₿

Dimensions (2.5kW – 5.0kW) CS-Z25UFRAW / CS-Z35UFRAW / CS-Z50UFRAW



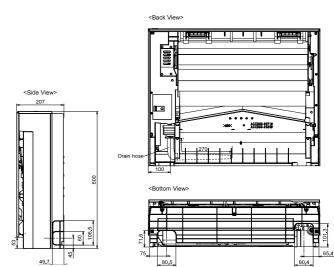





unit: mm

# Smart Connectivity and **Control Solutions**

Panasonic offers a range of smart connectivity and control solutions for residential and commercial applications that allow you to conveniently manage and monitor air conditioning units in single or multiple locations from one mobile device. Add solutions for partners such as contractors and service providers that simplify everything from configuration to repair diagnosis and discover a streamlined, next-generation air conditioning ecosystem.



Home Panasonic Automation Comfort Cloud Ready

**CLIPSAL** 



### **For Light Commercial**

## **Cost effective Energy Management Solution**

Panasonic **Comfort Cloud** 

Panasonio

AC Smart Clou

PAC Smart Connectivity<sup>+</sup>

23.5\*



C2-TACG1 or C2-CAPWFC1 Network Adaptor required per unit. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available. To use Amazon Alexa to control your air conditioner, you will need an Google Assistant device. Google Assistant to control your air conditioner, you will need an Google Assistant device. Google ILC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google Home and Alexa are compatible with the air conditioning systems shown on pages 4 and 5. Google and Alexa functionality is only available with complete air conditioning systems (including Panasonic controllers)

## Wide Range of Smart Control Solutions for All Needs

Whether you're a contractor or service provider looking for solutions to streamline everything from configuration to repair diagnosis, a facility manager overseeing multiple sites or a single office, or you're simply managing a home system, we offer a range of innovative, next-generation smart control solutions to suit your needs.



62

## Personal Control Solutions **Panasonic Comfort Cloud**

### Remotely manage and monitor multiple air conditioning units in your home

Easily control and access all features of the air conditioning units with smart centralised control.

### Intuitive voice control

Control air conditioning units by voice command connecting to smart speaker.



### **PLUG & PLAY FOR HOME AUTOMATION**

Easily connect with integrated controllers to become part of your automated home network

For further information please check CLIPSAL® we





### Multiple location control at your convenience with Comfort Cloud

Gain control of multiple zones and sites intuitively adjusting temperature by areas with differentiated user rights settings.

### Indoor Air Quality(IAQ) and efficient energy usage with PAC Smart Connectivity<sup>+</sup>

• Ultimate cooling comfort with sensing technology and automatic IAQ control. Simplified Plug & Play installation with BMS connection for better energy consumption.

## Full Control of All Installations From A Single Internet Connection Panasonic AC Smart Cloud

### Manage and monitor energy consumption patterns

Analyse energy usage, running time and optimise temperatures to reduce energy costs.

### Centralised control solution with zero downtime

Receive real-time status updates to prevent breakdowns.

### Flexible and scalable solution for expanding businesses and multi sites

Adaptable solutions that can easily be upgraded for new features, meet user demand and better IT management.

# Panasonic Comfort Cloud

Control air conditioning units from wherever and whenever with your smartphone, by using Panasonic Comfort Cloud and WLAN smart adaptor.

This scalable solution is ideal for one system, one site or multiple locations. Coupling the adapter with the already feature rich systems, makes it an ideal solution for both residential and commercial applications.



### For Residential

Remotely manage and monitor air conditioning units from anywhere anytime.

### For Light Commercial

Gain control of multiple zones and sites intuitively up to 200 indoor units.

## Panasonic Comfort Cloud features

### Voice Control

Control air conditioning units by voice command intuitively connecting to smart speaker.\*1



### From 1 to 200 units

User can control up to 200 indoor units. 10 different sites, with up to 20 units / groups per site.



### Easy Scheduling

Complex weekly scheduling made simple. Not only for one units, but across multiple sites and from a smartphone.

SUN MON TUE WED THU FRI Custom timer according to your working day and hou

## Application Examples



Centralised control from reception.

## System configuration

Network Adaptor CZ-TACG1 CZ-CAPWFC1

## **Connection Diagram**





Indoor Unit

CZ-TACG1: For products for small sized project. CZ-CAPWFC1: Available for all types of VRF and PAC indoor unit.

## WLAN Smart Adaptor specification

	CZ-TACG1	CZ-CAPWFC
Input Voltage	DC 12V (Suppli	ed from indoor unit)
Power Consumption	Maximum 0.66W	Maximum 2.4W
Size [H x W x D]	66 x 36 x 12mm	120 x 70 x 25m
Weight	Approx. 85g	190g (including
		communication
Interface	Wireless L	AN
Wireless LAN Standard	IEEE 802.	11 b/g/n
Frequency range	2.4GHz ba	and
Encryption	WPA2-PS	K(TKIP/AES)
Operation range	0-55°C, 2	0 - 80RH%
*1 CZ-TACG1 or CZ-CAPWEC1 Network Ada	antor required per unit	

TACG1 or CZ-CAPWFC1 Network Adaptor required per unit. Julies an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available. Ise Amazon Alexa to control your air conditioner, you will need an Amazon Echo device. Ise Google Assistant to control your air conditioner, you will need an Google Assistant device. Iso, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Igle and Alexa are compatible with the air conditioning systems shown on pages 4 and 5. Igle and Alexa are compatible with complete air conditioning systems (including Panasonic controllers). tion available depending on the model.

64

### Multiple User

The Panasonic Comfort Cloud App allows multiuser access control. Restrict user access to specific units.


### **Energy Monitor**

See the estimated power consumption and compare with other periods to see how energy bill can be reduced even more.\*2

### Error Codes

Error code notification through the App, provides early notification and allows for faster repair.









Multiple location control for small business.









In conformity with IEEE 802.11





Panasonic **Cloud Server** 




App Store Google Pla Comfort Cloud App

### Compatible Device and Browsers

1. IOS 9.0 or above 2. Android 5.0 or above

# Plug & Play for Home Automation

Easily connect with integrated controllers to become part of your automated home network. Plug & Play with Clipsal solutions to enjoy simplicity you've been waiting for, empowering you to take control of your home's technology.

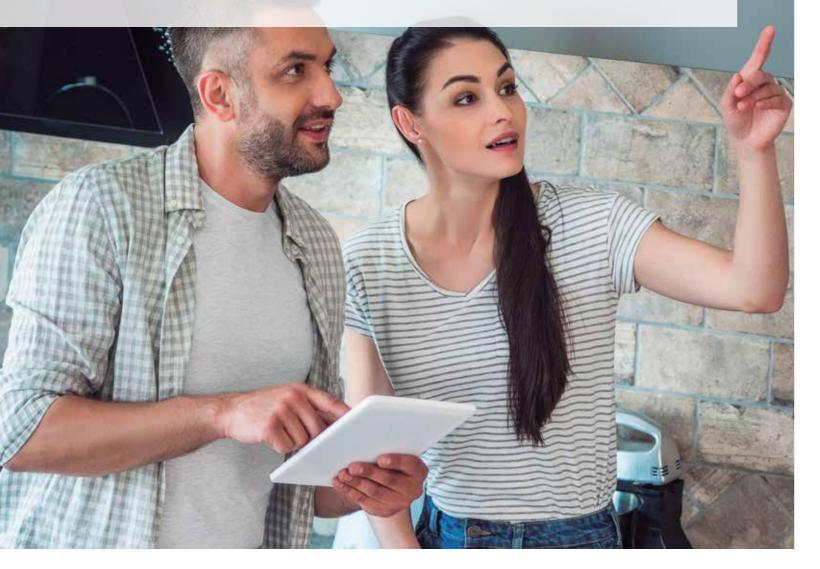

# Panasonic Schneider

Panasonic partnering with Schneider Electric offering home automation solution with CLIPSAL interfaces and devices.



by Schneider Electric

## Easy Design / Plug & Play

Clipsal control solution brings you smart home technologies and enables you to control devices at your fingertips from any smart phone or tablet. Panasonic air conditioners are ready for this smart home automation with just plug-and-play connectivity.



Applies to selected Panasonic Air Conditioning systems only, please consult with Panasonic for more details.


## Case study

Panasonic VRF system was selected for the smart apartments, Lilydale Grove, which integrates robust automation technology to simplify your life. While other air conditioner brands need a adaptor to connect to HEMS, Panasonic can seamlessly connect with Schneider's Home automation, one of the market leaders in the HEMS industry.

•Air conditioning system	FSV Heat Recovery (20 systems)		
	FSV Heat Pump (4 systems)		
<ul> <li>Cooling Capacity</li> </ul>	742kW		
Indoor units	278 units		
<ul> <li>Control System</li> </ul>	SE8000 series 278units		

Note: System combination as of July 2020

Note: For further information please check CLIPSAL® website.

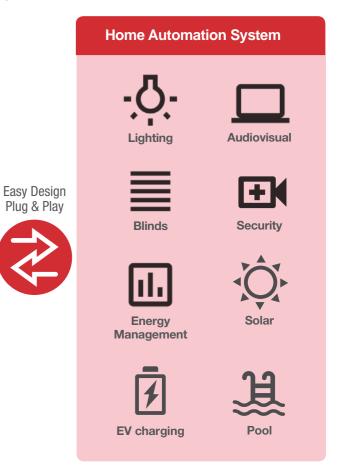




# PAC Smart Connectivity+


Through thorough energy management, Panasonic's PAC Smart Connectivity<sup>+\*1</sup> is a completely new, state-of-the-art solution providing energy saving and comfort as well as simple installation, operation and maintenance.



## PAC Smart Connectivity+

PAC Smart Connectivity<sup>+</sup> offers efficient energy management and a new air conditioning control solution with high IAQ (Indoor Air Quality).

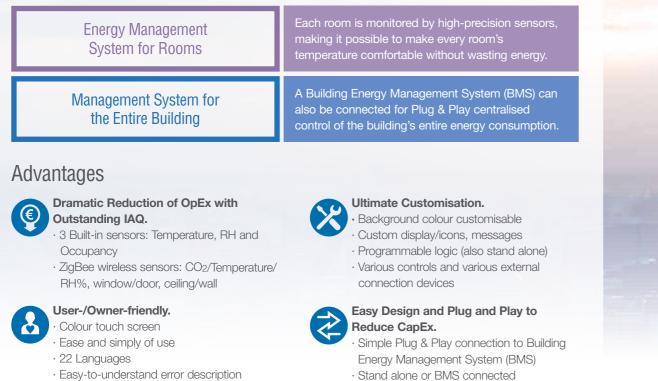



# PAC Smart Connectivity+ ~New SE8000 series~

## 1. Quality Air Control

interior remains comfortable, while heating and cooling costs are

## 2. Room Key Card or Key Cardless Solutions for Hotels

Solutions are provided that meet the needs of various regions and hotel grades. Whilst the previous model's automatic detection function offered optimal air conditioning with or without a hotel room key card, the latest model enables conventional key cards to control air conditioners and other devices coordinately. The increase in the types of devices that can be connected enables customized control of any hotel room.

## 3. Other Equipment Control


One room controller manages various devices including lighting and the blinds.

### \*1 Not compatible with Ultra Slim Ducted, 4-Way Mini Cassette and Floor Console systems







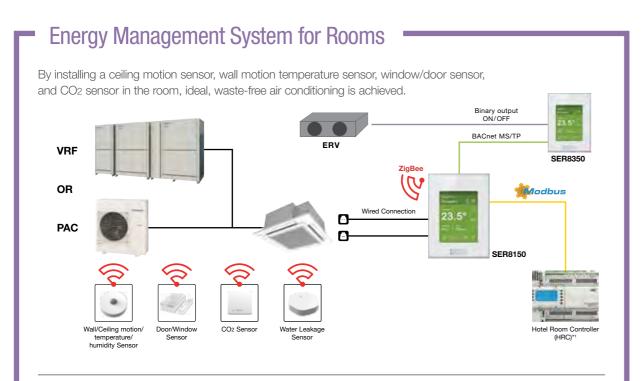


### Sensing & Control technology

Using sensors from Schneider Electric, high-quality occupancy control and automatic IAQ control were realised. The sensors detect the presence or absence of occupants, and the opening and closing of doors and windows to achieve the most efficient energy management for exceptional air-conditioned comfort. Flexible installation is possible to match different applications and building features such as walls, ceilings and proximity to doors and windows. No wiring means extra installation versatility.



Batteries last for up to five years (10-year battery for  $CO_2$  sensor) and are easy to install and replace.

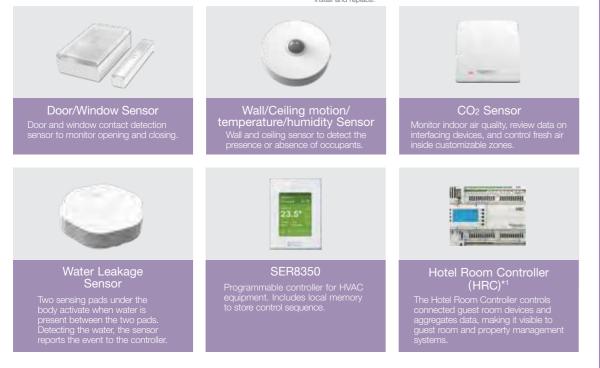


<sup>\*1</sup> Available through a Schneider Electric distribution channel.

## Management System for the Entire Building<sup>\*2</sup>

The smarter solution to simplify energy management, optimise building efficiency and drive savings.

### Plug and Play BMS connection.

With the SER8150, connection to BMS is extremely easy. Better still, a remote controller is all that's needed to enable use as a stand-alone system. In addition to dramatically reducing the burden on system integrators, this cuts costs.

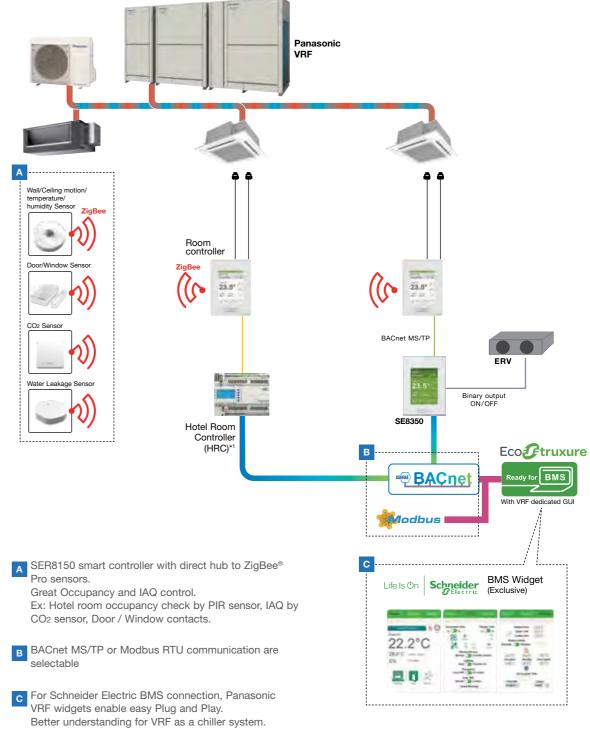

\*2 Graphic shows combination of products from Panasonic, Schneider Electric and others. Currently, some products might not available in Australia, please consult authorised dealer for more details.

## Smart Management Solutions


### 1 Hotels **Room Key Card or Key Cardless Solutions for Hotels**

The SER8150 and ZigBee Sensor automatic detection function offer optimal air conditioning regardless of whether there is a hotel room key or not. Sensors detect the presence or absence of occupants and the opening and closing of doors and windows for the optimum air-conditioned environment guests expect. Automatic control ensures the most efficient operation when guests are away or when windows are open. This contributes to an appreciable reduction in operation costs.

### 1. Remote sensing & IAQ contorol


In addition to detecting a room's temperature, humidity and CO2 concentration, ZigBee remote sensors detect the opening/closing of windows and doors, and the presence/ absence of people in a room.

Various IAQ controls and detailed energy savings are possible by using SE8350 based on this detected information.

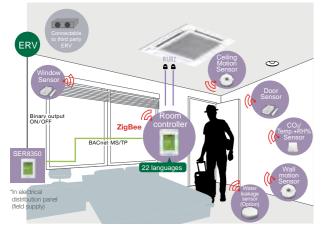


### 3. Key Cardless control

The introduction of SE8350 and HRC enables conventional wired keycards to be connected to the system so that it is possible to meet the specific requirements of various hotel and room types

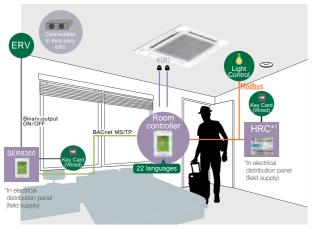


### 2. BMS Connectivity

By setting HRC\*1 as the guestroom controller, sensing, control and BMS connection can be realized in coordination with SER8150!

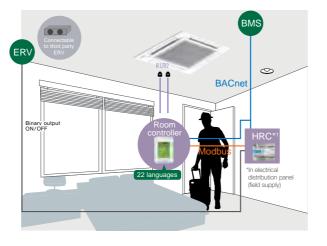

### 4. Other control

The introduction of SE8350 and HRC enables the on/off control of devices having dry contact input, such as ventilation, lighting and blinds.

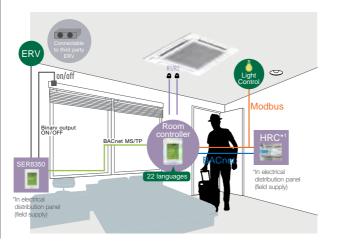

### 2 Small and Medium Offices



### CO<sub>2</sub> sensors (option) and Humidity sensors

CO2 sensors (option) take measurements in units of ppm, and humidity sensors enable fine air quality control. This creates the most comfortable space for occupants while contributing to improved employee satisfaction.

Humidity sensors Humidity sensors enable automatic dehumidification for the optimum IAQ regardless of climatic conditions. This creates an even more comfortable environment for customers, employees, and products themselves.

## Innovative and Unrivalled Advantages

### **Colour and Design to Match Office Interiors**

Colour combinations and design can be set to match different facilities.



### Easy-to-Understand Error Description Error description during an

emergency is easy to understand, enabling staff to respond quickly.





### Smart Connectivity Devices



- · Up to 5-year battery life batteries included (CO2 sensor is 10 years) Features · Battery level is a point
  - Sensor points visible when SER8150 is integrated via BACnet MS/TP
  - · Sensor status and battery level visible when SER8150 is integrated via ZigBee® Pro

**3** Super Markets



### Customisation in 22 Languages Possible

The display can be customised to match the native languages of guests to enable smooth, stress-free

communication for hospitality at its finest.




### **Programmable Logic**

Full customisation of remote control logic possible, and updating to match conditions.

	Description	Reference	Description
Par	na Net Con, RH, No PIR, SE Brand, R1R2	ZigBee Sensors	
Pan	a Net Con, RH, PIR, SE Brand, R1R2	•	0 11 D 00 T 1 11 11
1	Wireless ZigBee Pro communication card	SED-C02-G-5045	Sensor with Room CO2, Temperature and Humidity
	The cost and the communication card	SED-TRH-G-5045	Sensor with Room Temperature and Humidity
		SED-WDC-G-5045	Door/Window Sensor
E	BACnet MS/TP, 24VAC, 7UI/4UO/4DO	SED-MTH-G-5045	Wall/Ceiling motion/temperature/humidity Sensor
		SED-WLS-G-5045	Water Leakage Sensor
	Hotel Room Expansion Module 1410		
_	otel Room Controller 2810		
_			
	Hotel Room Controller w/Display 4210		

Dimension

### PAC Smart Connectivity<sup>+</sup> controller external dimensions

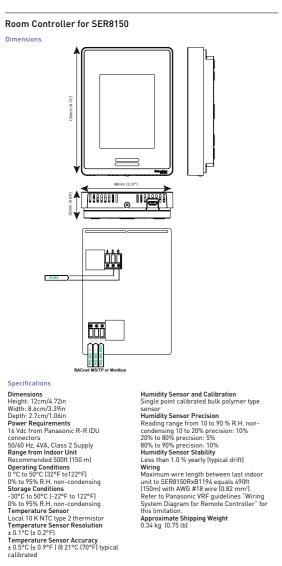

Dimensions Colour Weight Communication Detection Range Ceiling: Ø4m (installation height 2.5m)  $\bigcirc$ R5m (installation height 1.2m) Battery Voltage Battery Cell Battery Life Ambient Temperature 3V LR03 AAA (2pcs) Up to 5 years -10° - +50°C Certification FC (E @ 7 Check with your local government for instruction on disposal of these products. Door/Window Wireless Sensor SED-WDC-G-5045 Din 16.3 ((·)) Master part 50 **\_** (-) Slave part Specifications Master part: 50mmx33mmx16.3mm Slave part: 50mmx9mmx9mm White/transp. Dimensions Colour Weight Communication Detection Range Winteyrransp. 30g ZigBee 3.0 HA Trigger 'close': wood 30mm, metal 18mm Tigger 'open': wood 32mm, metal 20mm 3V CR2450 Battery Voltage Battery Cell Battery Life Ambient Temperature Up to 5 years -10° - +50°C


Wall/Ceiling Wireless Sensor SED-MTH-G-5045

Specifications

70mm diam..x26.6mm White 59g ZigBee 3.0 HA


Certification

FC (E A Z

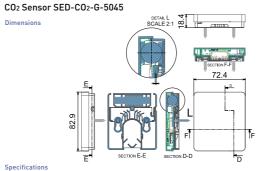

Check with your local government for instruction on disposal of these products.


Specifications	
Dimensions	3.26in x 2.85in x 0.72in 82.9 mm x 72.4 mm x 18.4 mm
Operating Temperature Temperature Accuracy Humidity Range Humidity Accuracy Measurement Range Measurement/	0°C to 50°C (32°F to 122°F)
Transmission Intervals	Note: Battery life will be reduced should interval
CO2 Accuracy at NTP Communication Battery Voltage Battery Cell Battery Life	be shortened (i.e. using remote temperature/humidity functions) ±60ppm +3% of reading (400 - 2,000ppm range) Zigbee 3.0 Green Power (encrypted, bi-directional) 3.6 V AA Lithium ion 10+ years (non-replaceable) Note: Battery life can be reduced when sensor is operated at temperatures approaching the operating limits.
Ambient Temperature	-30°C to 70°C
Certification	
FC (( @ 7	Check with your local government for instruction on disposal of these products.

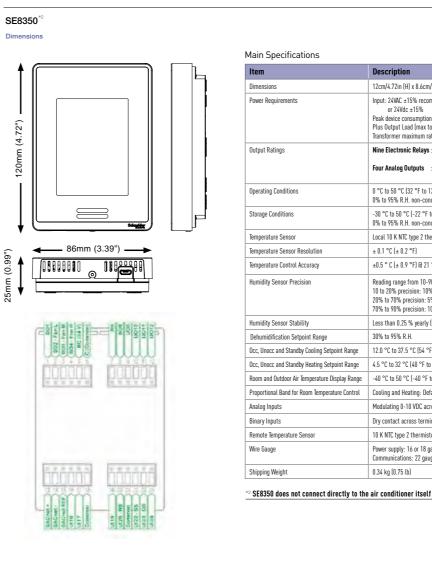


### Hotel Room Controller HRC\*

Dir

<u>o</u>





Specifications

Dimensions

Certification CCC Check with your local government for instruction on disposal of these products

		EH	SECTION E-E	SECTION D-D
	Specifications			
70.8mmx66.7mmx19mm	Dimensions		85in x 0.72in 72.4 mm x 18.4	mm
White 64g ZigBee 3.0 HA 3V LR03 AAA (2pcs) Up to 5 years	Operating Temperature Temperature Accuracy Humidity Range Humidity Accuracy Measurement Range Measurement/	±0.3°C (0.5 0% to 100	64 °F) typical with % ypical within 0%	hin operating r
≥ 90 mW ≥ 5 dBm -10° - +50°C 2405-2480 MHz	Transmission Intervals	Note: Batt be shorter	s (day), 10 minut ery life will be re ied (i.e. using re re/humidity fund	educed should mote
2400 2400 1112	CO2 Accuracy at NTP Communication Battery Voltage Battery Cell Battery Life	±60ppm +3 Zigbee 3.0 3.6 V AA Lithiur 10+ years	3% of reading (40 Green Power (e	00 - 2,000ppm ncrypted, bi-di e)
rnment for hese products.	Ambient Temperature Certification	temperatu -30°C to 7	rés approaching D°C	the operating
	50 44 A 7	Cher	k with your loc:	al governmen

Specification

Certification FC (E C Z

Check with your local government for instruction on disposal of these products.

Specifications Dimensions Colour Weight Communication Battery Voltage Battery Cell Battery Life Rated Powersmitted Ambient Temperature Frequency Band

Check with your local government for instruction on disposal of these products.

THIS PRODUCT FOR COMMERCIAL USE ONLY

Water Leakage Sensor

	Description	
	12cm/4.72in (H) x 8.6cm/3.38in (W) x 2.5cm/1in (D)	
	Input: 24VAC ±15% recommended, Absolute Max 29.5VAC, 50/60Hz or 24Vdc ±15% Peak device consumption: up to 6VA with CO2 sensor or Wi-Fi module Plus Output Load (max total 94VA) Transformer maximum rating: 100VA, 4.17 A	
	Nine Electronic Relays : 24VAC or 24Vdc ±15% same as input power, 1.0 Amp, in-rush = 3.0 Amps;           Four Analog Outputs         : 0 - 10Vdc, fxAn maximum, 12 kilo-ohm resistance) Configurable Output Analog/Electronic Relay	
	0 °C to 50 °C (32 °F to 122 °F) 0% to 95% R.H. non-condensing	
	-30 °C to 50 °C (-22 °F to 122 °F) 0% to 95% R.H. non-condensing	
	Local 10 K NTC type 2 thermistor	
	± 0.1 °C (± 0.2 °F)	
	±0.5 ° C (± 0.9 °F) @ 21 °C (70 °F) typical	
	Reading range from 10-90 % R.H. non-condensing 10 to 20% precision: 10% 20% to 70% precision: 5% 70% to 90% precision: 10%	
	Less than 0.25 % yearly (typical drift)	
	30% to 95% R.H.	
point Range	12.0 °C to 37.5 °C (54 °F to 100 °F)	
point Range	4.5 °C to 32 °C (40 °F to 90 °F)	
Display Range	-40 °C to 50 °C (-40 °F to 122 °F)	
ature Control	Cooling and Heating: Default: 1.8°C (3.2°F)	
	Modulating 0-10 VDC across U119, U124 to Common	
	Dry contact across terminals UI16, UI17 to Common	
	10 K NTC type 2 thermistor UI20, UI22, UI23	
	Power supply: 16 or 18 gauge Communications: 22 gauge typical, 24 gauge minimum	
	0.34 kg (0.75 lb)	

5.6in x 4.3in x 2.4in 144m x 110mm x 60.5mm 10 x 3 A SPST +250 VAC relays

12 x configurable analog inputs D: voltage free DI, 10 kΩ input impedance 0-20mA: range 0.1000, < 150 Ω impedance 6 x 0-10 V outputs. Load impedance > 700 Ω 24 VAC + 10% NOT ISOLATED +20...38 Vdc NOT ISOLATED 50/60 Hz 35 VA / 15 W -20 to 60 °C (-4 to 140 °F) conforming to UL 60730-1

# Panasonic AC Smart Cloud

With Panasonic AC Smart Cloud, have your business under control, and start saving!



## Flexible and scalable solution

· Energy saving · Zero downtime

· Site(s) management

Centralise control of your business premises, from wherever you are, 24/7/365. It doesn't matter how many sites you have, or where they are! The AC Smart Cloud system from Panasonic allows you to have complete control of all your installations, from your tablet or from your computer. In a simple click, all your units from several locations, receive status updates in real-time of all your installations, preventing breakdowns and optimising costs.



Every time Everywhere

Small to large

Multiplatform Internet browse

### Scalable solution for your business.



2. Unattended auto shut OFF.

monitor and stop automatically.

the outdoor units reduced.

When you want to operate outside of a schedule but to

ne set for unattended auto shut OFF

Detec

Detect

Forget to turn OFF

5. Demand / peak shaving settings/ Peak cut settings.

Specify time slots when you want operation capacity of


10:00 12:0013:00 15:00

PAC / VRF 1 to multi sites Upgrade features\*

\*1 Customised to meet user demand / Continuous upgrades: new functions and product introductions / IT smart management.

OFF

## Panasonic AC Smart Cloud offers continuous improvement always thinking about users

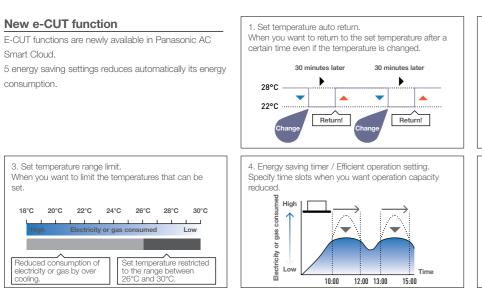

## Key functions and uniqueness

### Multi site monitoring

• It doesn't matter how many sites you have, easy to manage, operate, compare sites, locations, rooms,


1110 illilli. 👔

### Schedule setting Yearly / weekly / holiday timer setting as you want



### User customisation\*2

Site administrator can create users as desired and assign customised profiles.

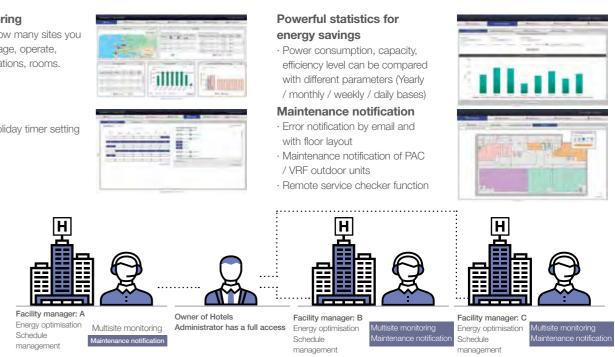

## Main functions per user type

Function / Main Tab	Sub-Tab	Basic type (Eg.: Owners, facility managers)	Professional type (Eg.: Installers, maintenance companies)	Function / Main Tab	Sub-Tab	Basic type (Eg.: Owners, facility managers)	Professional type (Eg.: Installers, maintenance companies)
	I_U / O_U operation details	<b>v</b>	V	Maintenance function	Notification overview / details	~	V
	Cloud adapter (CZ-CFUSCC1) details	v	~		Maintenance settings	V	~
AC setting	AC maintenance		~	Maintenance function	Map view	V	~
	Map view	v	~		Remote service checker		~
Energy saving function	NEW e-CUT	V	~	User account *2	New / update user registration	<b>v</b>	
Schedule	Yearly, weekly schedule setting / view	V	~		Distribution group overview / details	<b>v</b>	
Powerful statistics	Power consumption	v		System setting	Cut OFF request	<ul> <li>Image: A start of the start of</li></ul>	
	Capacity	v			Map editor		<b>v</b>
	Efficiency ranking	v					

## Remote service checker function

### Zero down time

• Quick analysis & response • Time & Cost saving for service maintenance task

### Recording service checker parameters from wherever you are!

· Data duration: Maximum 120 minutes

 $\oplus$ 

For professio profile

- · Data frequency: 10 90 seconds
- · Mode selection: With test run or Without test run
- · Count down schedule setting available


## Panasonic AC Smart Cloud parts lists

AC Smart Cloud communication adaptor. Up to 128 groups. 128 units control CZ-CFUSCC1 Note: Please contact an authorized Panasonic dealer.

### Panasonic AC Smart Cloud



\*2 Cloud service fee is additionally required. Please contact an authorised Panasonic dealer.

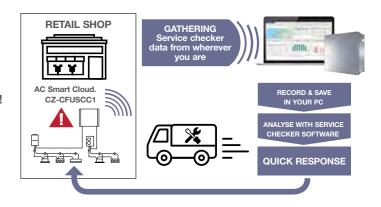

# Controllers

A wide variety of control options to meet the requirements of different applications.

### **Next Generation Control Solutions**





WLAN Control

Smart Cloud Control

N

OPERATION SYSTEM			INDIVIDUAL CONTROL SYSTEM	IS	
Requirements	Simplified high-spec operation	High-spec operation	Normal operation	Operation from anywhere in the room	Normal operation
External appearance	25.0t				-
	Simplified high-spec Wired Remote Controller	Deluxe Wired Remote Controller	Timer Remote Controller (Wired)	Wireless Remote Controller	Wired Remote Controller
Type, model name	CZ-RTC6BL CZ-RTC6BLW	CZ-RTC5B	CZ-RTC4	Controller: CZ-RWS3 Receiver: CZ-RWRU3 CZ-RWRL3 CZ-RWRD3 CZ-RWRT3 CZ-RWRC3	CZ-RD52CP
Built-in thermostat	٠	•	•		
nanoe <sup>™</sup> X on/off control *not applies to Floor Console	٠	٠		٠	_
ECONAVI on/off control	٠	٠	•	•	
Number of indoor units which can be controlled	1 group, 8 units	1 group, 8 units	1 group, 8 units	1 group, 8 units	1 unit
Use limitations	<ul> <li>CZ-RTC6BL : Up to 2 controllers can be connected per group(no combination possible with CZ-RTC6BL or CZ-RTC6BLW)</li> <li>CZ-RTC6BLW : Up to 1 controller can be connected per group</li> </ul>	Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	Up to 2 controllers can be connected per group. (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	Up to 2 controllers can be connected per group.	Only 1 controller for 1 indoor unit.
Function ON/OFF	•	•	•	•	•
Mode setting	•	•	•	•	•
Fan speed setting	•	•	•	•	•
Temperature setting	•	•	•	•	•
Air flow direction	•	•	•	•*1	•
Permit/Prohibit switching	—				
Weekly program	•*2	٠	•		

	CENTRALISED CONT	ROL SYSTEMS	
Operation with various function from centre station	Only ON/OFF operation from centre station	Simplified load distribution ratio (LDR) for each tenant	Conr 3rd Pa
from centre station		Touch screen panel	
			Seri-Pa ou
System Controller	ON/OFF Controller	Intelligent Controller	*
CZ-64ESMC3	CZ-ANC3	CZ-256ESMC3 (CZ-CFUNC2)	CZ-
			-
—		—	CZ
٠		•	Seri-Pa each
64 groups, max. 64 units	16 groups, max. 64 units	64 units x 4 links, max. 256 units	
<ul> <li>Up to 10 controllers, can be connected to one system.</li> <li>Main unit/sub unit (1 main unit + 1 sub unit) connection is possible.</li> <li>Use without remote controller is possible.</li> </ul>	<ul> <li>Up to 8 controllers (4 main units + 4 sub units) can be connected to one system.</li> <li>Use without remote controller is impossible.</li> </ul>	<ul> <li>A communication adaptor (CZ-CFUNC2) must be installed for three or more links.</li> </ul>	CZ- Com
•	•	•	CZ-
•		•	LonWo
•		•	
*1		*1	
•			CZ
•		•	

\*1 Setting is not possible when a remote controller unit is present (use the remote controller for setting).
\*2 CZ-RTC6BL with H&C Control App, CZ-RTC6BLW with H&C Control App or Comfort Cloud App. Note: Product images not to scale.



Note: Additional accessories or devices are required. Please consult Panasonic for details.



### Simplified high-spec wired remote controller (CZ-RTC6BL / CZ-RTC6BLW)



## CONEX

Deluxe wired remote controller (CZ-RTC5B)



CZ-RTC6BL(W) + CZ-RTC5B H&C CONTROL APP **Energy Saving** ECONAVI on/off Temperature Auto Return Temperature Setting range Auto Shutoff  $\bullet^*$ Schedule peak cut  $\bullet^*$ Repeat off timer  $\bullet^*$ Basic Operation Individual Louver Control(Lock individual flap for for 4-WAY cassette)  $\bullet^*$ ON/OFF timer  $\bullet^*$ Weekly timer Filter information Outing function • Quiet operation mode Power consumption monitor Energy saving initial settings \_ Ventilation  $\bullet^*$ nanoe™X Outdoor unit error data \_ \_ Service Contact address \_ RC setting mode Test run Sensor information Service check Simple/Detailed Settings Auto address Initial Settings  $\bullet^*$ Rotation operation Backup operation Support operation 

\*1 Only with H&C Control App \*2 Subject to the connected model \*3 Only with remote controller operation Note: Product images not to scale.

### New service checker interface



The new service checker interface provides easy access to service parameters and service checker data via Bluetooth®.




- A new service checker interface\*4 for PAC NX Series
- Bluetooth® connection
- Panasonic H&C Diagnosis App

\*4 Available as a spare part, compatible with new PAC NX Series.

## **Individual Control Systems**

Control contents	Part name, model No.	Quantity
Standard Control • Control of the various operations of the indoor unit by wired or wireless remote controller.	Wired remoted controller CZ-RTC4 / CZ-RTC5B / CZ-RTC6BL / CZ-RTC6BLW	1 unit each
<ul> <li>Cooling or heating mode of the outdoor unit is decided by the first priority of the remote controller.</li> </ul>	Wireless remote controller + Receiver CZ-RWS3 (Wall Mounted / Mini Cassette) CZ-RWS3 + CZ-RWRU3 (4-WAY Cassette) CZ-RWS3 + CZ-RWRT3 (Under Ceiling) CZ-RWS3 + CZ-RWRC3 (All split type)	
<ul><li>(1) Group control</li><li>Batch remote control on all indoor units.</li><li>Operation of all indoor cells in the same mode.</li></ul>	Wired remoted controller CZ-RTC4 / CZ-RTC5B / CZ-RTC6BL / CZ-RTC6BLW	As required
<ul> <li>Up to 8 units can be connected.</li> <li>The sensor is the body sensor, and thermostat ON/OFF setting in regard to the temperature set by the remote controller is possible for each indoor unit.</li> </ul>	Wireless remote controller + Receiver CZ-RWS3 (Wall Mounted / Mini Cassette) CZ-RWS3 + CZ-RWRU3 (4-WAY Cassette) CZ-RWS3 + CZ-RWRT3 (Under Ceiling) CZ-RWS3 + CZ-RWRC3 (All split type)	
<ul> <li>(2) Main/sub remote control</li> <li>Max 2 remote controllers per indoor unit. (Main remote controller can be connected)</li> </ul>	Main or sub Wired remoted controller CZ-RTC4 / CZ-RTC5B / CZ-RTC6BL	As required
<ul> <li>The button pressed last has priority.</li> <li>Timer setting is possible even with the sub remote controller. When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit.</li> </ul>	Wireless remote controller + Receiver CZ-RWS3 (Wall Mounted / Mini Cassette) CZ-RWS3 + CZ-RWRU3 (4-WAY Cassette) CZ-RWS3 + CZ-RWRT3 (Under Ceiling) CZ-RWS3 + CZ-RWRC3 (All split type)	

### SYSTEM EXAMPLE

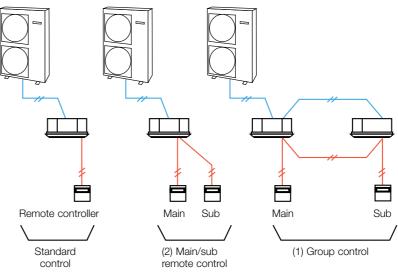

Input voltage	220-240 V ~ 50-60 Hz (supplied from outdoor unit)
Power consumption	Maximum 2,4 W (including outdoor units)
Size (H x W x D)	175 x 125 x 50 mm
Weight	-
Interface	Bluetooth® 4.2 or later
Frequency range	2,4 GHz band
Operation range - Temperature / Humidity	0 ~ 40 °C / 20 ~ 80 % (no condensation)

\* Frequency band in which the ratio equipment operates;


2402 - 2480 MHz.

Maximum radio-frequency power transmitted in the frequency bands in which the ratio equipment operates; +0 dBm.

Note: Conectable number of controllers, controller conbination, conectable indoor units, remote control maximum wiring length are different between the controller. Please confirm the Installation Instructions of controller or consult with Panasonic service center.

### New wired RC & Monitor adaptor & App compatibility\*

\*1 End User App Recommendation CZ-RTC6BL - H&C Control App CZ-RTC6BLW – Comfort Cloud App

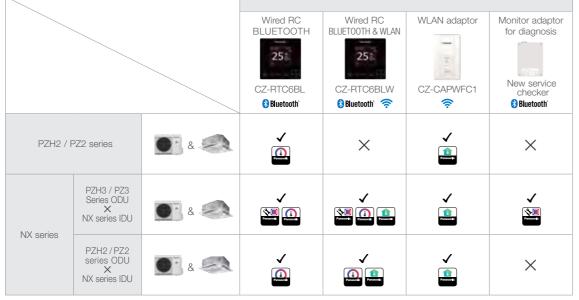

Note: Power supply is available only when using NX IDU

### Timer remote controller (CZ-RTC4)



Dimensions H 120 x W 120 x D 20 mm

### Basic remote controller ON/OFF

- Operation mode changeover (Cooling, Heating, Dry, Auto, Fan).
- Temperature setting (Cooling / Dry: 18-30 °C Heating: 16-30 °C).
- Fan speed setting H / M / L and Auto.
- Air flow direction adjustment.
- ECONAVI on / off\*2

### Time Function 24 hours real time clock

• Day of the week indicator.

### Weekly Programme Function

• A maximum of 6 settings/day and 42 settings/week can be programmed.

### **Outing Function**

• This function can prevent the room temperature from dropping or rising when the occupants are out for a long time.

### Sleeping Function

• This function controls the room temperature for comfortable sleeping.

Maximum 8 indoor units can be controlled from one remote controller

Remote control by main remote controller and sub controller is possible

Maximum 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

\*2 Depending on the model, some menus cannot be used.

### Wireless remote controller



CZ-RWS3

.

E

For all Ducted types CZ-RWS3 +CZ-RWRC3

....

For Under Ceiling type CZ-RWS3 +CZ-RWRT3

B = 21

8 = <u>21</u> +CZ-RWRU3

possible

be installed for one indoor unit.

### When CZ-RWS3+CZ-RWRC3 is used, wireless control becomes possible for all indoor units

- also becomes possible.
- exhausted.

operation switching, wind direction/fan speed setting, etc

Ventilation independent operation is possible When commercial ventilation fans or heat-exchange ventilation fans have been installed, they can be operated with this remote control (interlocked operation with the indoor unit or independent ventilation ON/OFF).

### Wired remote controller (CZ-RD52CP)



### Remote control by main remote controller and sub controller is

• Maximum 2 remote controllers (main remote controller and sub controller) can

• When a separate receiver is set up in a different room, control from that room

• Automatic operation by means of the emergency operation button is possible even when the remote controller has been lost or the batteries have been

## In addition, there are other functions such as temperature setting,


## T10 Terminal for External Control (Digital Connection)

Connecting an indoor unit to an external device is easy. The T10 Terminal featured in the electronic circuit board of all indoor units enables digital connection to external devices.





### 1. T10 Terminal Specification (T10:CN061 at indoor unit PCB)

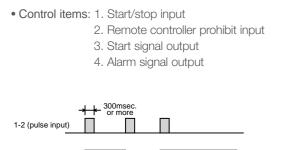



NOTE: The wire length from indoor unit to the Relay must be within 2.0m. Pulse signal changeable to static with JP cutting. (Refer to JP001)


### 2. Usage Example

### Forced OFF control

### Condition

1-2 (Static input): Close/ Operation with Remote is permitted. (Normal condition) Open/ Unit is forcibly OFF and Remote controller operation is prohibited

### Example of wiring

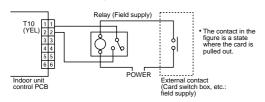

Note: The wire length from indoor unit to the Relay must be within 2.0m

· Example of wiring COM COM T10 (yellow)

### Condition


- 1. 1-2 (Pulse input): Unit ON/OFF condition switching with a pulse signal. (1 pulse signal: shortage status more than 300msec.or more)
- 2. 2-3 (Static input): Open/ Operation with Remote is permitted.(Normal
- condition) Close/ Remote controller is prohibited.
- 3. 4-5 (Static output): 12V output during the unit ON. / No output at OFF. 4. 5-6 (Static output): 12V output when some errors occur / No output at norma

### Operation ON/OFF signal output

### Condition

4-5 (Static output): 12V output during the unit ON / No output at OFF

### · Example of wiring



Pulse signal changeable to static with JP cutting. (Refer to JP001)



### Reducing inefficient air conditioning

Providing outstanding energy-saving performance, Panasonic's large capacity air conditioners can be connected to ECONAVI to detect when energy is being wasted.

ECONAVI senses the presence or absence of people and the level of activity in each area of a room. When unnecessary heating or cooling is detected, indoor units are individually controlled to match room conditions for energy-saving operation.

### How 2 sensors work for human detection



## Detection of the level of activity enables optimum power saving

Presence or absence of people and the level of activity in the room are detected in real time. Set temperature is automatically adjusted to optimise the power consumption.

### Case study at coffee shop



In the morning Reduced cooling when re are fewer people.

In the afternoon Thorough cooling when there is a high level of activity



utomatic Thermo Off depending on conditions at the end of the day.



Note: The wire length from indoor unit to the Relay must be within 2.0m




CZ-CENSC1

• please check specific models for compatibility


### Sensors are remotely located to maximise the energysaving effect

When sensors are built into the indoor unit, pillars, walls, cabinets and other fittings can obstruct the sensors, reducing the area of detection and lowering the energy-saving effect. Panasonic sensors can be located any where in the room which enables the optimum layout for sensors in any location.


### Wide detection area

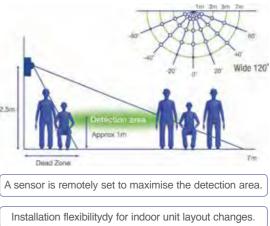


## Remote Controller External Dimensions

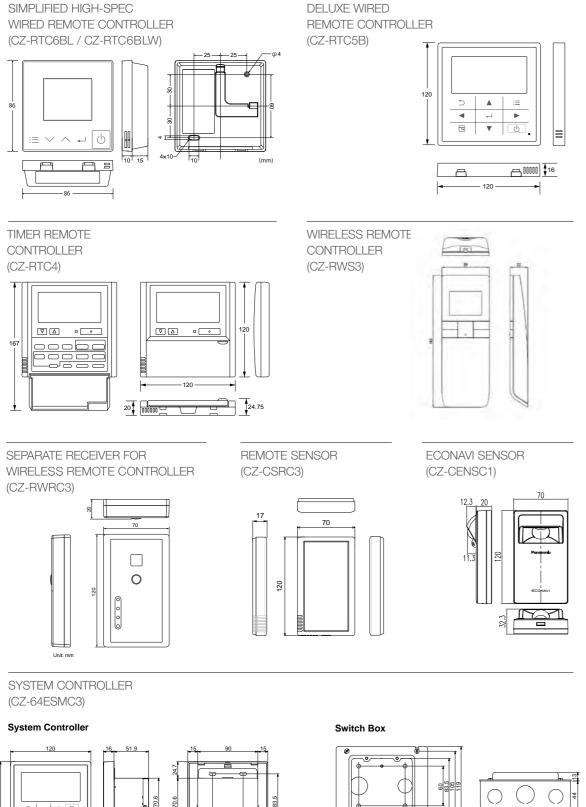

## Remote Controller External Dimensions

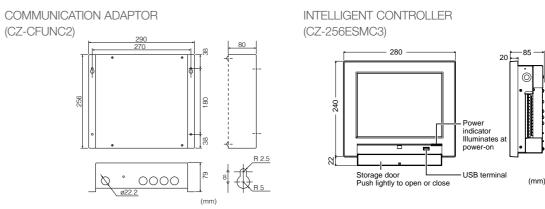

ON/OFF CONTROLLER (CZ-ANC3)

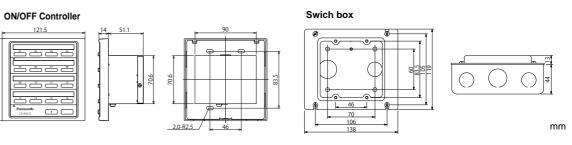



SERI-PARA I/O UNIT FOR EACH INDOOR UNIT (CZ-CAPBC2)

WLAN ADAPTOR


(CZ-TACG1)

WIRED REMOTE CONTROLLER FOR RESIDENTIAL MODEL (CZ-RD52CP)









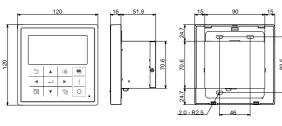

mm



mm



WLAN ADAPTOR (CZ-CAPWFC1)

